Wooden plastic flooring uses environmentally friendly materials and is free of harmful substances such as formaldehyde, making it green and healthy. The product is waterproof, moisture-proof, anti-aging, corrosion resistant, resistant to 75 ℃ high temperature and -40 ℃ low temperature, not easy to crack and deform, free of paint and maintenance, easy to install, and can replace traditional anti-corrosion wood.



3D circular hole floor
140X25mm

Square hole floor
150X20mm

Double sided patterned flooring
140X25mm

Square hole floor
140X25mm

Square hole floor
146X25mm

Color card

cinerous Redwood color coffee Walnut color black Red pine color light gray teak

Wood plastic materials come in a variety of colors, with multiple options available to meet the needs of different customers.

Case presentation

installation analysis

Co extruded wood plastic flooring is a new member of the wood plastic family that has emerged in recent years and has been highly regarded. Imitation natural wood grain design, with rich colors, consistent depth, long-lasting patterns, strong three-dimensional sense, beautiful and anti slip, the core layer and co extruded surface layer are completed synchronously. Compared with ordinary wood plastic flooring, it has stronger weather resistance, is more beautiful and durable, and has a longer service life, giving people a gentle and comfortable feeling, bringing users high practical value, ornamental value, and aesthetic enjoyment; It is an excellent environmentally friendly material used in parks, greenways, seaside resorts, swimming pools, cruise decks, home and outdoor facilities, and other purposes.

Round hole floor
140X23mm

Round hole floor
140X23mm

Round hole floor
140X23mm



Round hole floor
140X23mm

Solid flooring
138X23mm

Color card

The surface of co extruded plastic wood is rich in colors, with a natural and smooth wooden feel that is durable and does not fade. It is simple and heavy, giving people a feeling of variability, undulation, and life movement, which is pleasing to the eye and appropriately expresses the harmony between people and movement, life and rhythm.

Detail display







Case presentation

NUWEN
+86-18680577977

Add:Unit 1,no.187,Xiayang road,Hetang Town ,PengjiangDistrict,Jiangmen City,Guangdong Province , China. E-mail: nuwen.china.2020@gmail.com Mobile: +86-18680577977 WeChat/Whats app: +86-18680577977

Offline embossing is applied to the surface of wood plastic flooring, and surface treatment is carried out using high-temperature embossing rollers to give the originally monotonous frosted surface a rich and colorful wood texture, improving its aesthetics and providing a better visual effect. Multiple patterns to choose from, with a stronger woody feel.

Offline embossing
140X25mm

Offline embossing
140X25mm

Offline embossing
150X20mm

Offline embossing
150X25mm

Color card

Redwood color | Walnut color | coffee | Pure Black | teak

Case presentation

Online embossed wood plastic flooring has high density and strength, with a 3D imitation wood grain on the front, and a natural appearance and texture of wood on the surface. The grain is clear, and the relief three-dimensional sense is strong, making it high-end and atmospheric; The reverse straight stripes are simple and elegant, durable, with strong compression resistance and good anti slip effect. After long-term use and wear, they can still maintain a good texture effect.

3D embossed square hole floor
150X25mm

3D embossed circular hole floor
140X25mm

3D embossed solid flooring
140X25mm

3D embossed wall panels
156X21mm

Color card

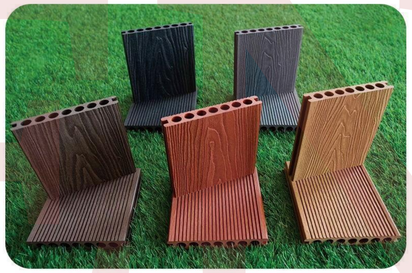



Case presentation



NUWEN
+86-18680577977

Add:Unit 1,no.187,Xiayang road,Hetang Town ,PengjiangDistrict,Jiangmen City,Guangdong Province , China. E-email: nuwen.china.2020@gmail.com Mobile: +86-18680577977 WeChat/Whats app: +86-18680577977



3D embossing
140X25mm

Square hole floor
150X20mm

solid plate
140X20mm

solid plate
70X10mm



Square hole floor
150X25mm

Square hole floor
140X25mm



Square hole floor
150X25mm



Round hole floor
140X25mm

Square hole floor
146X25mm

Square hole floor
145X22mm

Round hole floor
140X25mm

Relief pattern
140X25mm

Embossing line
150X25mm

Square hole floor
140X25mm



Solid supply and extrusion
138X23mm

Square hole floor
140X25mm

INSTALLATION DIAGRAM OF WOOD PLASTIC FLOORING

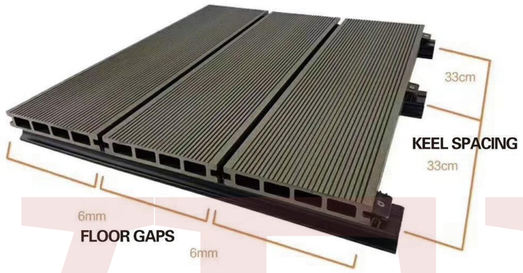

STEP 1: LEVEL THE GROUND, LAY THE KEEL, AND CONTROL THE SPACING BETWEEN 30–35CM. THEN FIX THE KEEL WITH AMERICAN NAILS. FINALLY, INSTALL THE FIRST FLOOR AND FIX THE SCREWS FROM THE CONCAVE SIDE, AS SHOWN IN THE FIGURE.



STEP 2: AFTER FIXING THE FIRST FLOOR, INSTALL THE PLASTIC ACCESSORIES AS SHOWN IN THE PICTURE. BE CAREFUL NOT TO FIX THE SCREWS TIGHTLY TO FACILITATE THE INSTALLATION OF THE SECOND FLOOR. PLEASE BE AWARE!



STEP 3: NEXT, FIX THE SECOND FLOOR AND REPEAT THE SECOND AND THIRD STEPS, AS SHOWN IN THE FIGURE.



STEP 4: AFTER THE FLOOR IS INSTALLED, INSTALL THE EDGE BANDING AS SHOWN IN THE FIGURE. FIX THE SCREWS WITH A SPACING OF ABOUT 40CM.

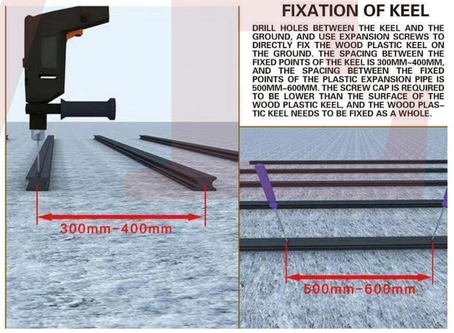

FIXATION OF KEEL

DRILL HOLES BETWEEN THE KEEL AND THE GROUND, AND USE EXPANSION SCREWS TO DIRECTLY FIX THE WOOD PLASTIC KEEL ON THE GROUND. THE SPACING BETWEEN THE FIXED POINTS OF THE KEEL IS 300MM–400MM, AND THE SPACING BETWEEN THE FIXED POINTS OF THE PLASTIC EXPANSION PIPE IS 500MM–600MM. THE SCREW CAP IS REQUIRED TO BE LOWER THAN THE SURFACE OF THE WOOD PLASTIC KEEL, AND THE WOOD PLASTIC KEEL NEEDS TO BE FIXED AS A WHOLE.

FIXATION OF FLOORING

FIRST, PLACE THE FIRST WOODEN PLASTIC FLOOR PARALLEL TO THE KEEL AND USE CONNECTORS TO CONNECT IT TO THE GROOVES ON BOTH SIDES OF THE WOODEN PLASTIC FLOOR. USE SELF TAPPING SCREWS TO FIX THE CONNECTORS TO EACH KEEL PRESSED ON THE FLOOR, AND THEN INSERT THE SECOND FLOOR PARALLEL TO THE SIDE

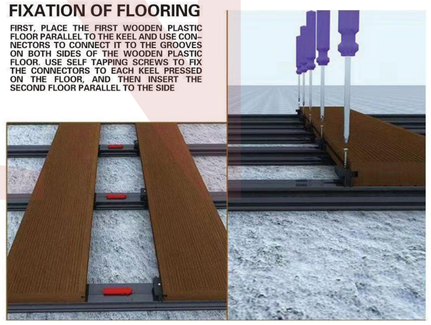

STAINLESS STEEL CARD
(1MM GAP)

PLASTIC BUCKLE
(5MM GAP)

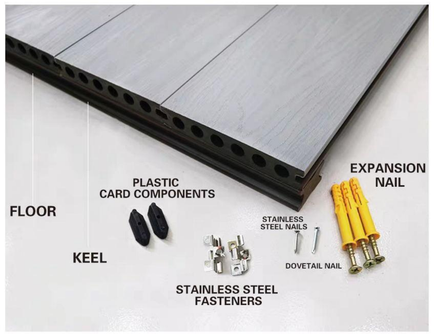

NUWEN
+86-18680577977

Add:Unit 1,no.187,Xiayang road,Hetang Town ,PengjiangDistrict,Jiangmen City,Guangdong Province , China. E-mail: nuwen.china.2020@gmail.com Mobile: +86-18680577977 WeChat/Whats app: +86-18680577977





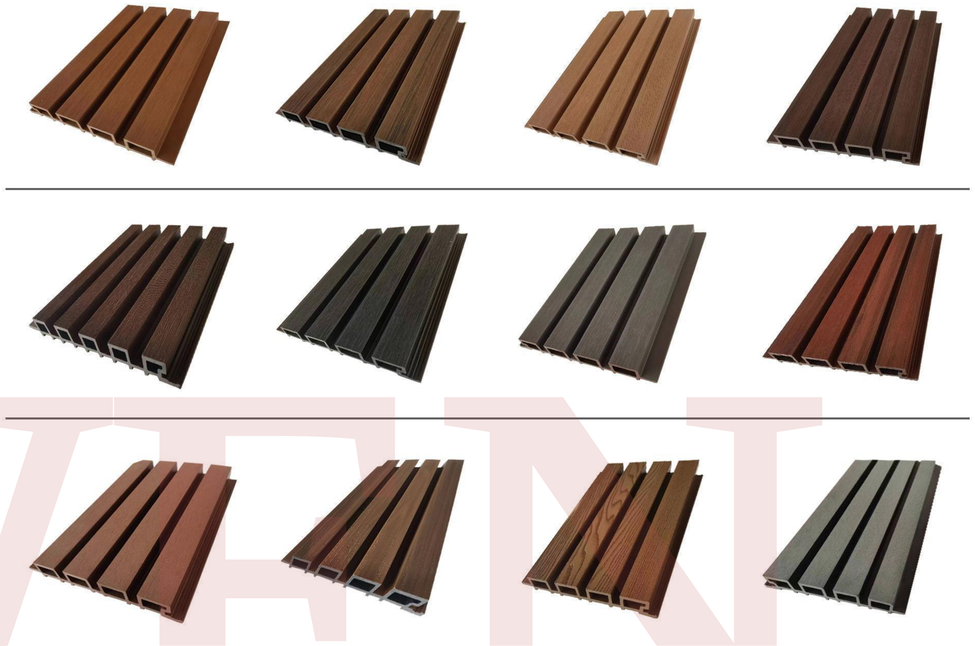

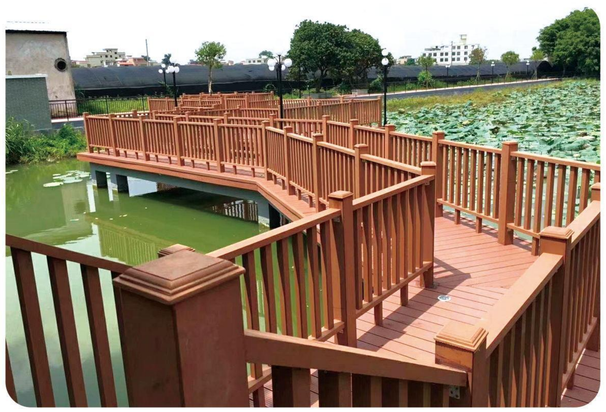

Wood plastic materials are rich and colorful

Wood plastic materials are adaptable to various environments

Wood plastic materials can be recycled

Wood plastic is supported by national policies

For our bright future,

Use more wood and plastic to save forests!

Good wood plastic

True quality

INSTALLATION DIAGRAM OF WOOD PLASTIC GREAT WALL PANEL

1. INSTALL THE KEEL

FIX THE KEEL ON A FLAT WALL SURFACE. THE KEEL MUST BE IN A HORIZONTAL POSITION ON THE WALL SURFACE BEFORE LAYING THE PANEL. THE SPACING BETWEEN THE KEELS MUST BE STRICTLY CONTROLLED AND CONSTRUCTED WITHIN A RANGE OF 50CM

2. FIXED BOARD

THE PRODUCTS ARE ARRANGED AND INSERTED FROM LEFT TO RIGHT FOR INSTALLATION. THE MALE BAR OF THE FIRST FAST GREAT WALL BOARD IS FIXED ON THE KEEL WITH SCREWS AS THE STARTING PLATE (WHEN FIXING, THE BOARD IS FIRST DRILLED). THEN, THE FIRST FEMALE POSITION IS FIXED, AND THE SECOND BOARD IS INSERTED INTO THE FEMALE GROOVE OF THE STARTING PLATE. SCREWS ARE INSERTED AT THE CONTACT POINT BETWEEN THE GROOVE AND THE KEEL TO FIX IT. THE REST ARE INSTALLED IN THE SAME WAY.

AND SO ON

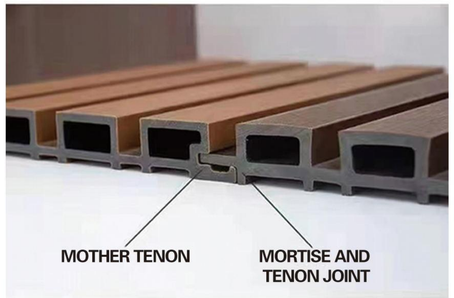

3. DOCK HANDLING

ACCORDING TO THE SIZE OF THE POSITION TO BE SPLICED, CUT A SUITABLE GREAT WALL PANEL FOR SPLICING, WITH THE INTERFACE FLUSH AND THE CONNECTING PORT FIXED ON THE KEEL.

4. EDGE FINISHING

MARK THE EDGES OF THE FINISHED AREA AND THE CORNERS OF THE WINDOWS WITH A FINISHING LINE TO BEAUTIFY THE EDGES. YOU CAN USE GLASS GLUE TO DIRECTLY BOND THEM, AND AFTER INSTALLATION, YOU CAN DIRECTLY MOVE INTO THE ROOM.

NUWEN
+86-18680577977

Add:Unit 1,no.187,Xiayang road,Hetang Town ,PengjiangDistrict,Jiangmen City,Guangdong Province , China. E-mail: nuwen.china.2020@gmail.com Mobile: +86-18680577977 WeChat/Whats app: +86-18680577977

Case presentation





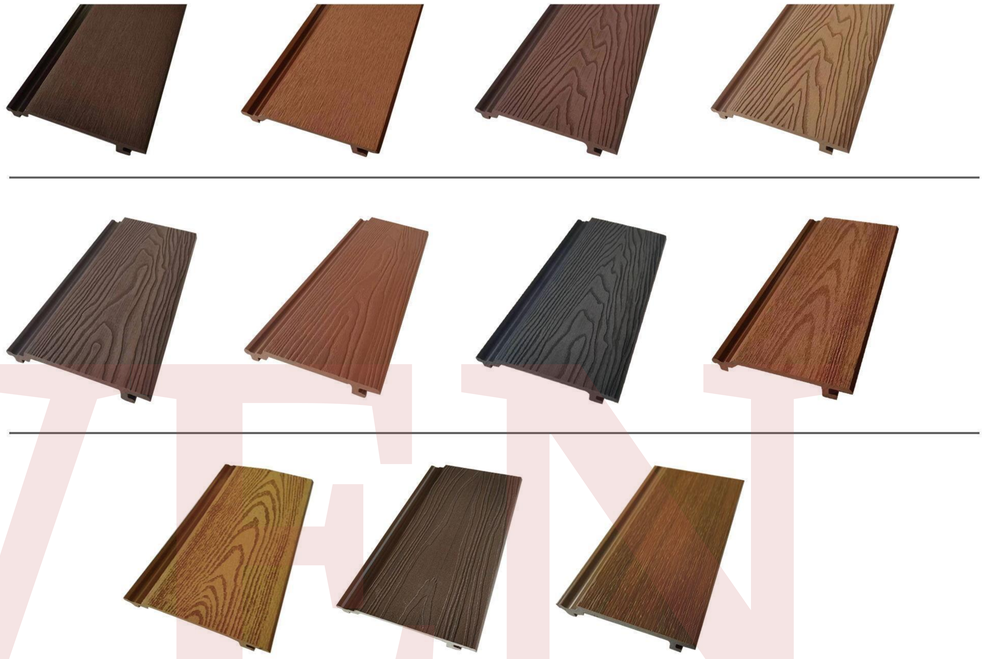

INSTALLATION DIAGRAM OF WOOD PLASTIC WALL PANELS

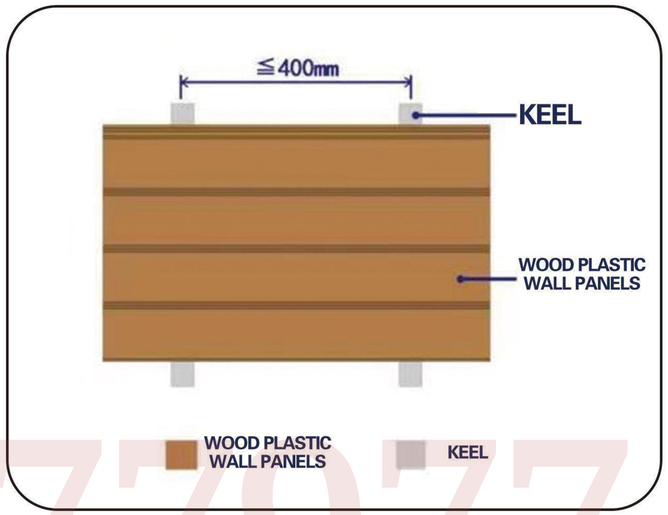

NUWEN
+86-18680577977

Case presentation

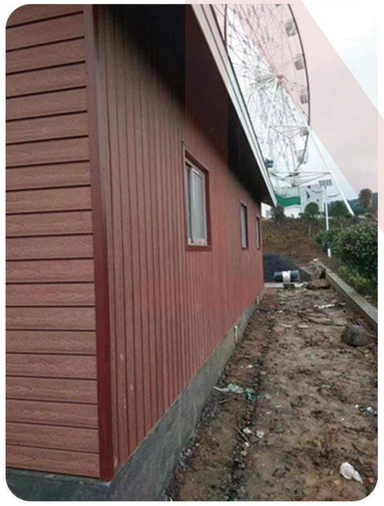

Wooden plastic guardrails are commonly used for waterfront bridge piers and lakeside boardwalks, in environments with high water content. They are waterproof, moth proof, and not moldy, making them more reassuring to use. The design is simple and not simple, with various combinations and combinations, providing strong protection capabilities and giving people a rich modern style.



Column
120*120mm/150*150mm

Wooden plastic handrail
80*45mm/50*100mm

Wooden plastic vertical brace
50*50mm

Accessories for guardrail installation



Wooden plastic guardrail style

Case presentation





NUWEN
+86-18680577977

Add:Unit 1,no.187,Xiayang road,Hetang Town ,PengjiangDistrict,Jiangmen City,Guangdong Province , China. E-email: nuwen.china.2020@gmail.com Mobile: +86-18680577977 WeChat/Whats app: +86-18680577977

Wooden plastic fences have better stability and impact resistance, stronger weather resistance, and longer service life. The classic and high-end exterior design is vivid yet not rigid, bringing a classic and elegant visual sense. It is mainly used for exterior wall decoration of buildings, high-end villa walls, and characteristic buildings in tourist attractions.

220*26mm



156*21mm

156*21mm

Wooden plastic fence

Designed with a combination of wood plastic materials and aluminum alloy frame, it can be installed at will, free of maintenance for life, simple yet full of charm, with a lively and beautiful appearance, making your rural life more private and colorful, showcasing a comfortable and warm high-quality life. Widely used in seaside gardens, high-end villa areas, leisure farms, etc.



160*20mm



160*20mm



160*20mm

Detail display

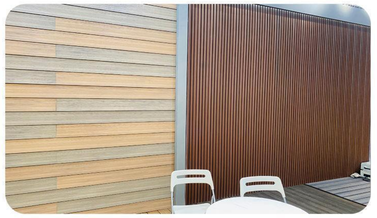



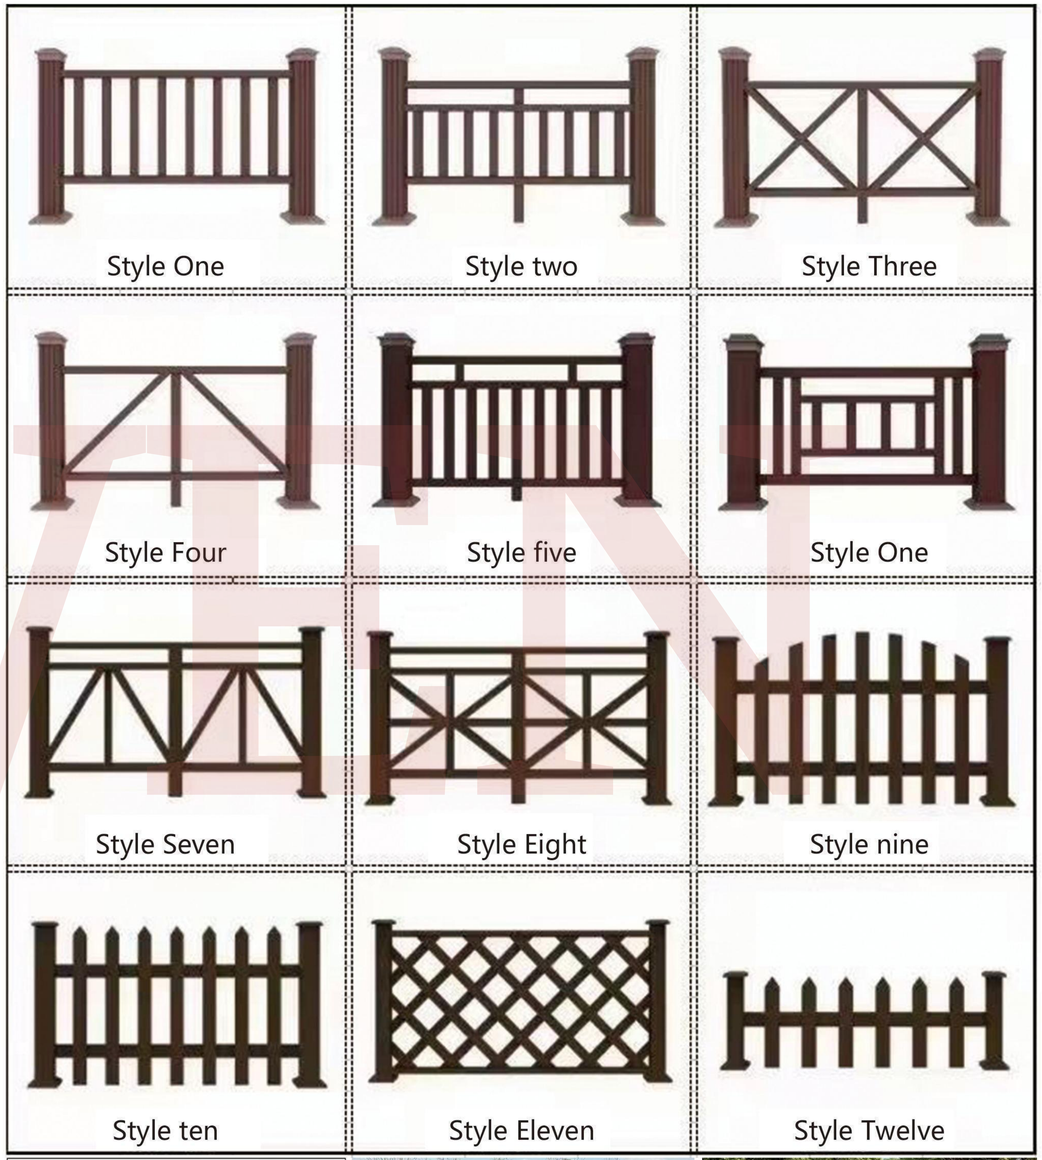

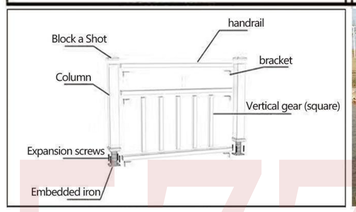

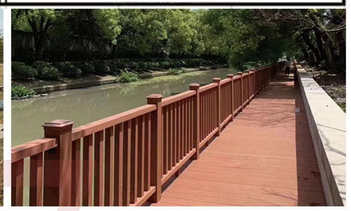

NUWEN
+86-18680577977

Add:Unit 1,no.187,Xiayang road,Hetang Town ,PengjiangDistrict,Jiangmen City,Guangdong Province , China. E-mail: nuwen.china.2020@gmail.com Mobile: +86-18680577977 WeChat/Whats app: +86-18680577977

As wood plastic materials continue to develop, as a good partner for wood plastic flooring, wood plastic accessories are also being developed and put into use simultaneously, making your installation experience of wood plastic flooring smoother and more convenient.

Column skirt and column cap

Universal armrest connector

Square wooden internal connectors

Armrest outer connector

Armrest outer connector

column base

Handrail inner connector

Seamless stainless steel floor buckle


Floor start buckle

Stainless steel corner code

5mm gap stainless steelfloor buckle

Plastic floor buckle

stainless steel screw

Dragon bone expansion thread

70 aluminum alloy column

70 column base

Keel support device

70 side edge strips

Concave bar

rib

Assembled flooring, abbreviated as DIY flooring, is made of high-quality wood plastic materials that are wear-resistant, dirt resistant, and fade resistant. It is easy to clean and comes in multiple combinations. It adopts a simple buckle design, and can be assembled immediately with one press. It is free of nails, glue, and keel, and can be self spliced. It is easy to disassemble and assemble, and can be used multiple times to beautify your balcony, terrace, and garden, adding a natural and dynamic visual effect.

Assembled flooring
300X300mm

Assembled flooring
300X300mm

Assembled flooring
300X300mm

Assembled flooring
300X300mm

案例展示











NUWEN
+86-18680577977

Add:Unit 1,no.187,Xiayang road,Hetang Town ,PengjiangDistrict,Jiangmen City,Guangdong Province , China. E-email: nuwen.china.2020@gmail.com Mobile: +86-18680577977 WeChat/Whats app: +86-18680577977

Wooden plastic wall panels have a wide range of applications and can be used for building exterior wall decoration, supporting integrated houses, surface decoration of container houses, wall beautification in new rural construction, and other fields.

wallboard
156X21mm



wallboard
148X21mm



Case presentation

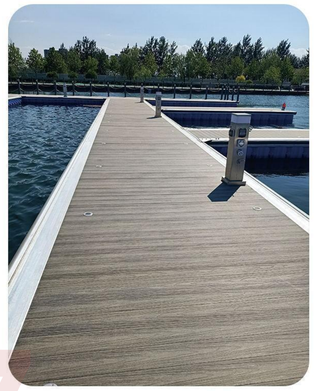

NUWEN
+86-18680577977

Add:Unit 1,no.187,Xiayang road,Hetang Town ,PengjiangDistrict,Jiangmen City,Guangdong Province , China. E-mail: nuwen.china.2020@gmail.com Mobile: +86-18680577977 WeChat/Whats app: +86-18680577977

Wooden plastic garden chairs
Tree chair

Wooden plastic flower box

Wooden plastic corridor frame
Liangting

REPEATED TECHNOLOGICAL INNOVATIONS

CO EXTRUSION PROCESS - DUE TO THE PRESENCE OF A PROTECTIVE FILM ON THE SURFACE, IT BECOMES EASIER TO CLEAN, STRONGER, WATERPROOF, AGING RESISTANT, AND INSULATION RESISTANT TO HIGH TEMPERATURES

FIRST GENERATION WOOD PLASTIC

THE TEXTURE IS ROUGH AND UNCLEAR

SECOND GENERATION WOOD PLASTIC

CLEAR AND BEAUTIFUL PATTERNS

MULTIPLE STYLES OF FLOWER BOXES

PROVIDE CUSTOMIZED SERVICES

FOR MORE INFORMATION PLEASE CONSULT CUSTOMER SERVICE

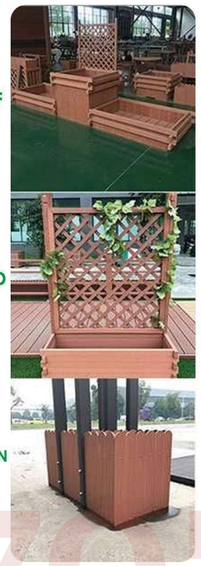

NUWEN
+86-18680577977

Add:Unit 1,no.187,Xiayang road,Hetang Town ,PengjiangDistrict,Jiangmen City,Guangdong Province , China. E-email: nuwen.china.2020@gmail.com Mobile: +86-18680577977 WeChat/Whats app: +86-18680577977