

NUWEN
NUWEN

NUWEN

NUWEN CO.,LTD

Add:Unit 1,no.187,Xiayang road,Hetang Town Pengjiang District,Jiangmen City,Guangdong ,Province ,China.



E-mail: nuwen.china.2020@gmail.com

Mobile: +86-18680577977

WeChat/Whats app: +86-18680577977

New Catalog






NUWEN CO.,LTD

18680577977

Product catalog

1 QUALIFICATION CERTIFICATE
PAGE 03

2 LED DOWN LIGHT
PAGE 06-27




3 LINE LAMP
PAGE 28



4 LED PANEL LIGHT
PAGE 29-34



5 LED OUTDOOR MOISTURE PROOF LAMP
PAGE 35

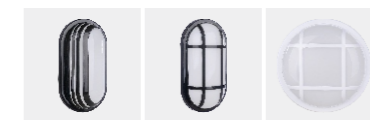

6 LED FLAT PANEL LIGHT
PAGE 36



7 LED CUP LIGHT
PAGE 37



8 LED FLOOD LIGHT
PAGE 38-42






9 LED STREET LIGHT
PAGE 43-46



10 LED HIGHBAY LIGHT
PAGE 47



LIGHT DISTRIBUTION CURVE

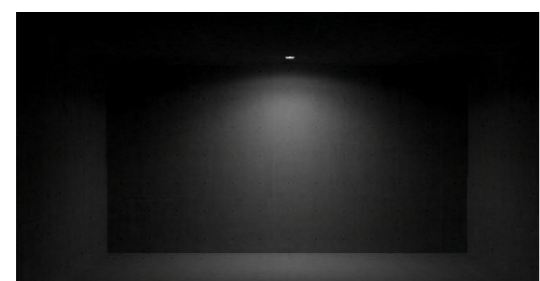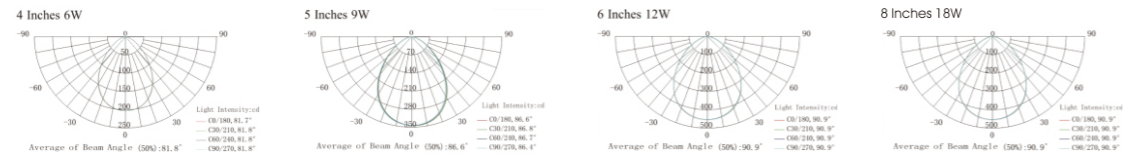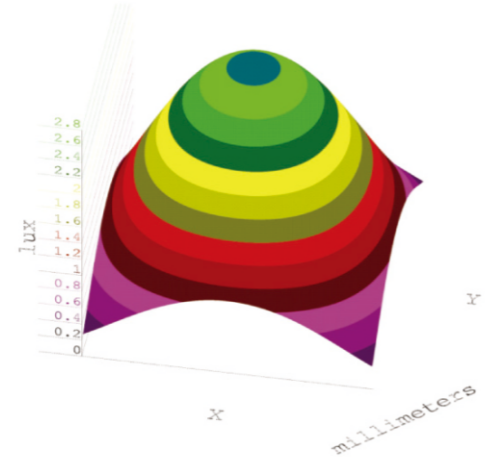


Beam angle: 82° / 87° / 91° / 95°



LIGHT DISTRIBUTION APPLICATION COMPARISON:


OSTAR LIGHTING's LED downlights have a light distribution angle of more than 80 degrees, which reduces the number of lamps used in the same area of the LED downlights of the same small angle, reducing investment costs and operating costs.

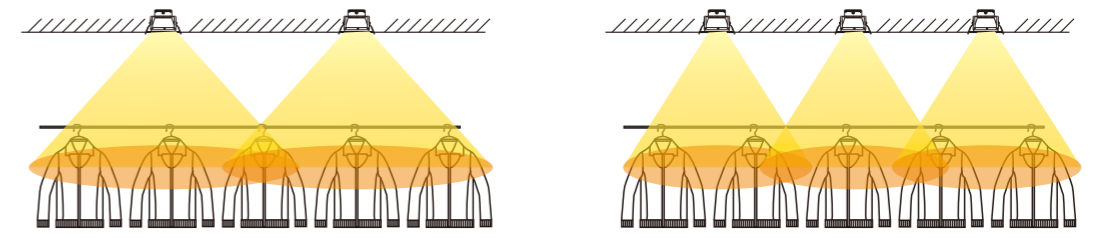

Downlight with large angle light distribution

Downlight with small angle light distribution

OSTAR LIGHTING's downlights are more than three times brighter than the same-powered energy-saving light bulbs, reducing the power of the lamps in the same area, and the energy saving rate can reach more than 60%.

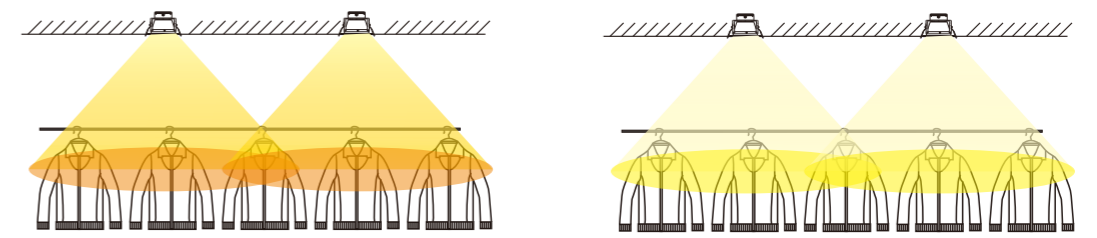


6W LED DOWN LIGHT

15W Energy saving Down light


+86-18680577977



6000~6500K Cool White 4000~4500K Natural White 3000~3300K Warm White

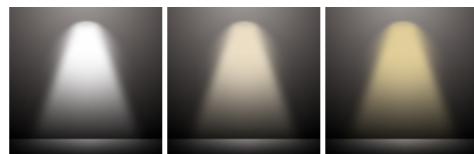

Beam Angle

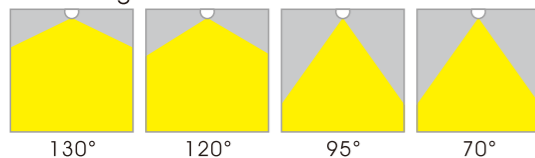


LED COB DOWN LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-DL001-7W	85-265V	50-60Hz	0.5	Ø90	Ø70	COB	7W	50x29.5x48	100	0.070
OS-DL001-10W	85-265V	50-60Hz	0.5	Ø130	Ø105	COB	10W	69x30x29.5	50	0.061
OS-DL001-15W	85-265V	50-60Hz	0.5	Ø165	Ø140	COB	15W	61x35x35.5	40	0.075
OS-DL001-20W	85-265V	50-60Hz	0.5	Ø190	Ø170	COB	20W	61x41x42	40	0.105
OS-DL001-30W	85-265V	50-60Hz	0.95	Ø225	Ø220	COB	30W	60x46.5x24	20	0.066


Features:

- Indoor use only
- Finish:White
- Material: Die-casting Aluminium Housing with tempered glass
- Use of external isolation constant Current driver
- Working Lifetime(Hour):30000hours
- Certificate:CB,CE,ROHS,TUV,SAA,SASO
- Warranty(Years): 3~5years
- Environment :no mercury/no UV -radiation
- Applications: It is widely used in Hotels, Residential Building , Restaurants,shopping mall&Department Stores, Museums& Exhibitions, Airports, Offices.


Cooperation partner



6000~6500K Cool White 4000~4500K Natural White 3000~3300K Warm White

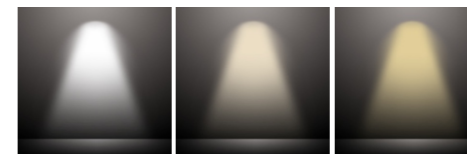

Beam Angle

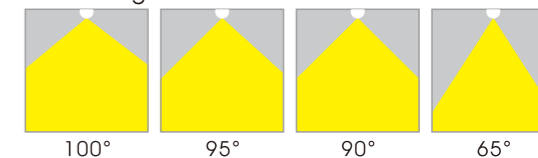

LED COB DOWN LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-DL003-7W	85-265V	50-60Hz	0.5	Ø90	Ø70	COB	7W	50x35x48	100	0.084
OS-DL003-10W	85-265V	50-60Hz	0.5	Ø130	Ø105	COB	10W	70.5x29.5x31	50	0.064
OS-DL003-15W	85-265V	50-60Hz	0.5	Ø165	Ø145	COB	15W	74x39.5x38	40	0.111
OS-DL003-20W	85-265V	50-60Hz	0.5	Ø195	Ø175	COB	20W	42x37x42	20	0.065
OS-DL003-30W	85-265V	50-60Hz	0.95	Ø225	Ø220	COB	30W	49x39.5x49	20	0.094

Features:


- Indoor use only
- Finish:White
- Material: Die-casting Aluminium Housing with tempered glass
- Use of external isolation constant Current driver
- Working Lifetime(Hour):30000hours
- Certificate:CB,CE,ROHS,TUV,SAA,SASO
- Warranty(Years): 3~5years
- Environment :no mercury/no UV -radiation
- Applications: It is widely used in Hotels, Residential Building , Restaurants,shopping mall&Department Stores, Museums& Exhibitions, Airports, Offices.

Cooperation partner






6000~6500K Cool White
4000~4500K Natural White
3000~3300K Warm White

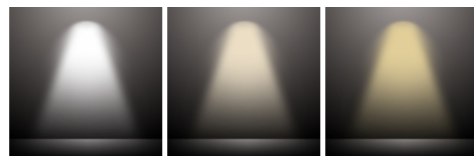

Beam Angle

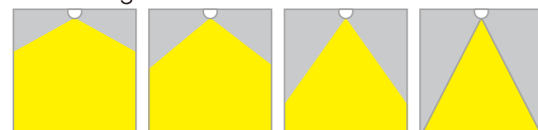

125° 105° 70° 55°



LED COB DOWN LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-DL004-7W	85-265V	50-60Hz	0.5	Ø95	Ø75	COB	7W	53x34.5x42	100	0.076
OS-DL004-10W	85-265V	50-60Hz	0.5	Ø120	Ø100	COB	10W	73x34.5x30	50	0.076
OS-DL004-15W	85-265V	50-60Hz	0.5	Ø165	Ø145	COB	15W	72x39.5x37	40	0.105
OS-DL004-20W	85-265V	50-60Hz	0.5	Ø195	Ø160	COB	20W	42x37x42	20	0.065
OS-DL004-30W	85-265V	50-60Hz	0.95	Ø225	Ø200	COB	30W	48x42x48	20	0.096

Features:


- Indoor use only
- Finish:White
- Material: Die-casting Aluminium Housing with tempered glass
- Use of external isolation constant Current driver
- Working Lifetime(Hour):30000hours
- Certificate:CB,CE,ROHS,TUV,SAA,SASO
- Warranty(Years): 3~5years
- Environment :no mercury/no UV -radiation
- Applications: It is widely used in Hotels, Residential Building , Restaurants,shopping mall&Department Stores, Museums& Exhibitions, Airports, Offices.



Cooperation partner



6000~6500K Cool White
4000~4500K Natural White
3000~3300K Warm White

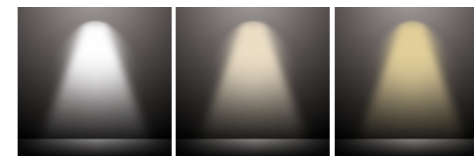

Beam Angle



120°



LED COB DOWN LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-DL014-50W	85-265V	50-60Hz	0.95	Ø230	Ø200	COB	50W	63x25x49	10	0.077

Features:

- Indoor use only
- Finish:White
- Material: Die-casting Aluminium Housing with tempered glass
- Use of external isolation constant Current driver
- Working Lifetime(Hour):30000hours
- Certificate:CB,CE,ROHS,TUV,SAA,SASO
- Warranty(Years): 3~5years
- Environment :no mercury/no UV -radiation
- Applications: It is widely used in Hotels, Residential Building , Restaurants,shopping mall&Department Stores, Museums& Exhibitions, Airports, Offices.




Cooperation partner






6000~6500K Cool White 4000~4500K Natural White 3000~3300K Warm White

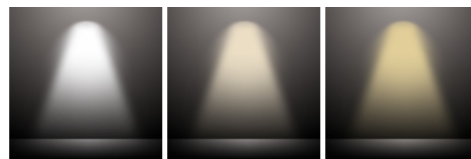

Beam Angle




125° 105° 70° 55°

LED COB DOWN LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-DL015-7W	85-265V	50-60Hz	0.5	Ø90	Ø70	COB	7W	50x34.5x48	100	0.070
OS-DL015-9W	85-265V	50-60Hz	0.5	Ø90	Ø70	COB	9W	50x34.5x48	100	0.070
OS-DL015-10W	85-265V	50-60Hz	0.5	Ø120	Ø100	COB	10W	65x37x29	50	0.053
OS-DL015-12W	85-265V	50-60Hz	0.5	Ø120	Ø100	COB	12W	65x37x29	50	0.053
OS-DL015-15W	85-265V	50-60Hz	0.5	Ø170	Ø140	COB	15W	73x38x39	40	0.108
OS-DL015-18W	85-265V	50-60Hz	0.5	Ø170	Ø140	COB	18W	73x38x39	40	0.108
OS-DL015-30W	85-265V	50-60Hz	0.95	Ø220	Ø200	COB	30W	48x37x51	20	0.091
OS-DL015-36W	85-265V	50-60Hz	0.95	Ø220	Ø200	COB	36W	48x37x51	20	0.091
OS-DL015-50W	85-265V	50-60Hz	0.95	Ø220	Ø200	COB	50W	63x25x49	10	0.083

Features:


- Indoor use only
- Finish:White
- Material: Die-casting Aluminium Housing with tempered glass
- Use of external isolation constant Current driver
- Working Lifetime(Hour):30000hours
- Certificate:CB,CE,ROHS,TUV,SAA,SASO
- Warranty(Years): 3~5Years
- Environment :no mercury/no UV -radiation
- Applications: It is widely used in Hotels, Residential Building , Restaurants,shopping mall&Department Stores, Museums& Exhibitions, Airports, Offices.

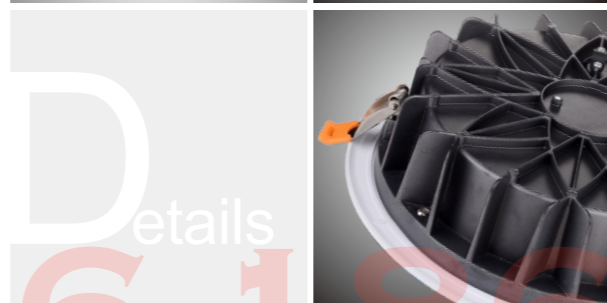


Cooperation partner



6000~6500K Cool White 4000~4500K Natural White 3000~3300K Warm White

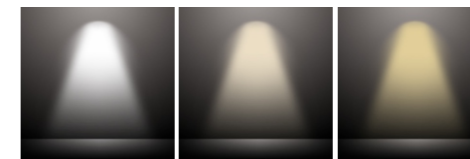

Beam Angle



125° 105° 70° 55°

LED COB DOWN LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-DL016-7W	85-265V	50-60Hz	0.5	Ø95	Ø75	COB	7W	53x34.5x42	100	0.076
OS-DL016-10W	85-265V	50-60Hz	0.5	Ø120	Ø100	COB	10W	65x27x30	50	0.053
OS-DL016-15W	85-265V	50-60Hz	0.5	Ø170	Ø145	COB	15W	58x38x39	40	0.085
OS-DL016-30W	85-265V	50-60Hz	0.95	Ø225	Ø200	COB	30W	47x29.5x51	20	0.071

Features:

- Indoor use only
- Finish:White
- Material: Die-casting Aluminium Housing with tempered glass
- Use of external isolation constant Current driver
- Working Lifetime(Hour):30000hours
- Certificate:CB,CE,ROHS,TUV,SAA,SASO
- Warranty(Years): 3~5Years
- Environment :no mercury/no UV -radiation
- Applications: It is widely used in Hotels, Residential Building , Restaurants,shopping mall&Department Stores, Museums& Exhibitions, Airports, Offices.




Cooperation partner






6000~6500K Cool White 4000~4500K Natural White 3000~3300K Warm White

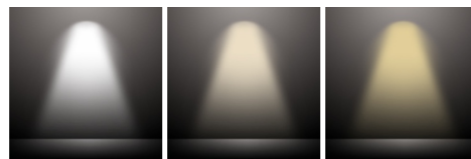

Beam Angle

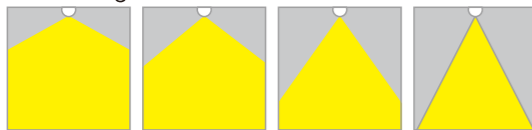


125° 105° 70° 55°

LED COB DOWN LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-DL017-7W	85-265V	50-60Hz	0.5	Ø90	Ø70	COB	7W	53x29.5x44	100	0.068
OS-DL017-7W	85-265V	50-60Hz	0.5	Ø105	Ø85	COB	7W	58x37x50	100	0.107
OS-DL017-10W	85-265V	50-60Hz	0.5	Ø120	Ø100	COB	10W	65x39.5x29	50	0.074
OS-DL017-15W	85-265V	50-60Hz	0.5	Ø170	Ø140	COB	15W	36.5x29.5x38	20	0.041
OS-DL017-20W	85-265V	50-60Hz	0.5	Ø190	Ø160	COB	20W	58.5x21.5x42.5	20	0.065
OS-DL017-30W	85-265V	50-60Hz	0.95	Ø225	Ø205	COB	30W	58x47x26	20	0.070

Features:


- Indoor use only
- Finish:White
- Material: Die-casting Aluminium Housing with tempered glass
- Use of external isolation constant Current driver
- Working Lifetime(Hour):30000hours
- Certificate:CB,CE,ROHS,TUV,SAA,SASO
- Warranty(Years): 3~5years
- Environment :no mercury/no UV -radiation
- Applications: It is widely used in Hotels, Residential Building , Restaurants,shopping mall&Department Stores, Museums& Exhibitions, Airports, Offices.

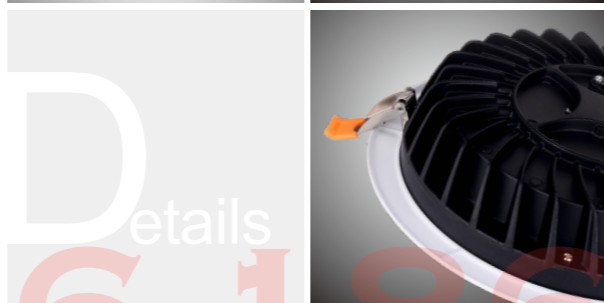


Cooperation partner



6000~6500K Cool White 4000~4500K Natural White 3000~3300K Warm White

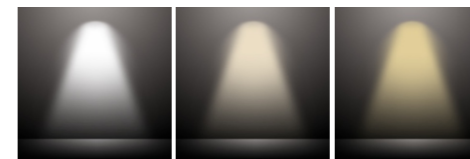

Beam Angle

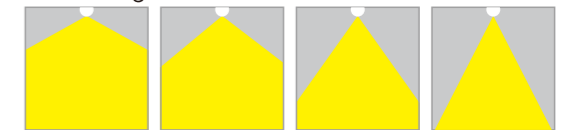


125° 105° 70° 55°

LED COB DOWN LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-DL018-7W	85-265V	50-60Hz	0.5	Ø95	Ø70	COB	7W	53x50x35	100	0.082
OS-DL018-10W	85-265V	50-60Hz	0.5	Ø130	Ø110	COB	10W	68x31.5x40	50	0.085
OS-DL018-12W	85-265V	50-60Hz	0.5	Ø130	Ø110	COB	12W	50x39x36	40	0.070
OS-DL018-20W	85-265V	50-60Hz	0.5	Ø165	Ø140	COB	20W	50x39x36	20	0.070
OS-DL018-40W	85-265V	50-60Hz	0.95	Ø220	Ø200	COB	40W	60x51x48	20	0.146

Features:

- Indoor use only
- Finish:White
- Material: Die-casting Aluminium Housing with tempered glass
- Use of external isolation constant Current driver
- Working Lifetime(Hour):30000hours
- Certificate:CB,CE,ROHS,TUV,SAA,SASO
- Warranty(Years): 3~5years
- Environment :no mercury/no UV -radiation
- Applications: It is widely used in Hotels, Residential Building , Restaurants,shopping mall&Department Stores, Museums& Exhibitions, Airports, Offices.

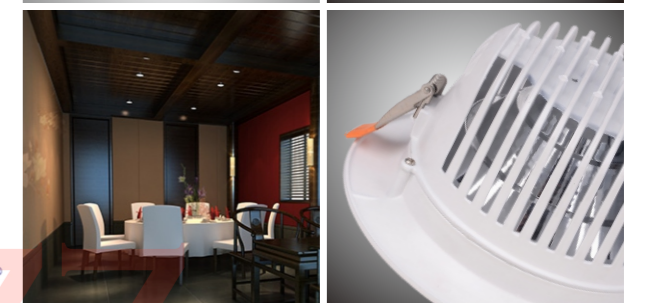


Cooperation partner






6000~6500K Cool White 4000~4500K Natural White 3000~3300K Warm White

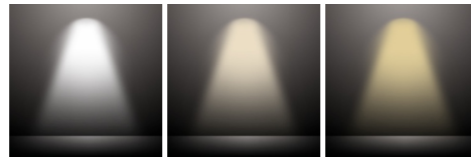

Beam Angle



125° 105° 70° 55°




LED COB DOWN LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-DL025-7W	85-265V	50-60Hz	0.5	Ø90	Ø70	COB	7W	50x29.5x48	100	0.078
OS-DL025-10W	85-265V	50-60Hz	0.5	Ø120	Ø100	COB	10W	65x32x28	50	0.058
OS-DL025-15W	85-265V	50-60Hz	0.5	Ø170	Ø140	COB	15W	63x37x39	40	0.090
OS-DL025-20W	85-265V	50-60Hz	0.5	Ø190	Ø170	COB	20W	42x37x42	40	0.065
OS-DL025-30W	85-265V	50-60Hz	0.95	Ø225	Ø200	COB	30W	48x32x48	20	0.073

Features:


- Indoor use only
- Finish:White
- Material: Die-casting Aluminium Housing with tempered glass
- Use of external isolation constant Current driver
- Working Lifetime(Hour):30000hours
- Certificate:CB,CE,ROHS,TUV,SAA,SASO
- Warranty(Years): 3~5years
- Environment :no mercury/no UV -radiation
- Applications: It is widely used in Hotels, Residential Building , Restaurants,shopping mall&Department Stores, Museums& Exhibitions, Airports, Offices.

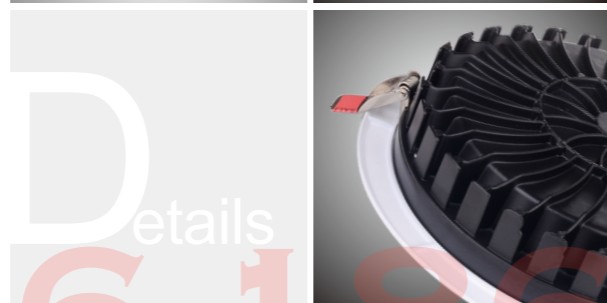


Cooperation partner



6000~6500K Cool White 4000~4500K Natural White 3000~3300K Warm White

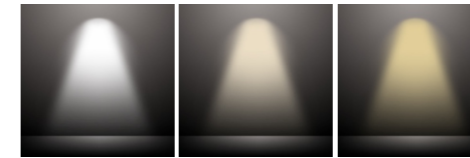

Beam Angle



125° 105°



LED COB DOWN LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-DL026-25W	85-265V	50-60Hz	0.5	Ø170	Ø140	COB	25W	38x26x40	20	0.070
OS-DL026-50W	85-265V	50-60Hz	0.95	Ø220	Ø200	COB	50W	48x39.5x25.5	10	0.070

Features:

- Indoor use only
- Finish:White
- Material: Die-casting Aluminium Housing with tempered glass
- Use of external isolation constant Current driver
- Working Lifetime(Hour):30000hours
- Certificate:CB,CE,ROHS,TUV,SAA,SASO
- Warranty(Years): 3~5years
- Environment :no mercury/no UV -radiation
- Applications: It is widely used in Hotels, Residential Building , Restaurants,shopping mall&Department Stores, Museums& Exhibitions, Airports, Offices.




Cooperation partner






6000~6500K Cool White 4000~4500K Natural White 3000~3300K Warm White

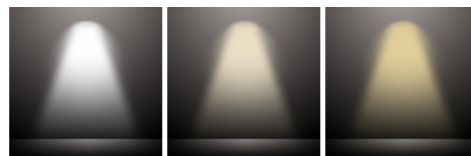

Beam Angle




125° 105° 70° 55°

LED COB DOWN LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-DL027-7W	85-265V	50-60Hz	0.5	Ø100	Ø75	COB	7W	53x34.5x42	100	0.076
OS-DL027-10W	85-265V	50-60Hz	0.5	Ø130	Ø100	COB	10W	65x27x30	50	0.053
OS-DL027-15W	85-265V	50-60Hz	0.5	Ø170	Ø140	COB	15W	58x38x39	40	0.085
OS-DL027-30W	85-265V	50-60Hz	0.95	Ø225	Ø200	COB	30W	47x29.5x51	20	0.071

Features:


- Indoor use only
- Finish:White
- Material: Die-casting Aluminium Housing with tempered glass
- Use of external isolation constant Current driver
- Working Lifetime(Hour):30000hours
- Certificate:CB,CE,ROHS,TUV,SAA,SASO
- Warranty(Years): 3~5years
- Environment :no mercury/no UV -radiation
- Applications: It is widely used in Hotels, Residential Building , Restaurants,shopping mall&Department Stores, Museums& Exhibitions, Airports, Offices.

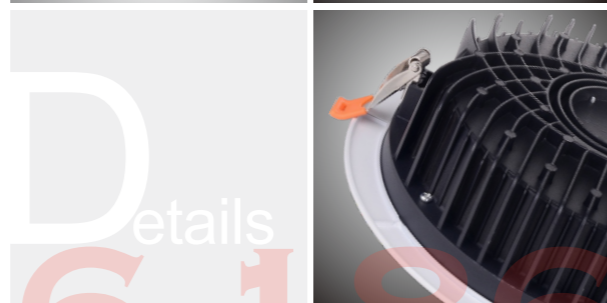


Cooperation partner



6000~6500K Cool White 4000~4500K Natural White 3000~3300K Warm White

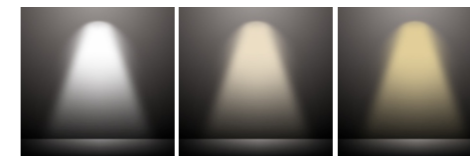

Beam Angle



125° 105° 70° 55°

LED COB DOWN LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-DL028-7W	85-265V	50-60Hz	0.5	Ø100	Ø75	COB	7W	53x34.5x42	100	0.076
OS-DL028-10W	85-265V	50-60Hz	0.5	Ø130	Ø100	COB	10W	65x27x30	50	0.053
OS-DL028-15W	85-265V	50-60Hz	0.5	Ø170	Ø145	COB	15W	58x38x39	40	0.085
OS-DL028-30W	85-265V	50-60Hz	0.95	Ø225	Ø200	COB	30W	47x29.5x51	20	0.071

Features:

- Indoor use only
- Finish:White
- Material: Die-casting Aluminium Housing with tempered glass
- Use of external isolation constant Current driver
- Working Lifetime(Hour):30000hours
- Certificate:CB,CE,ROHS,TUV,SAA,SASO
- Warranty(Years): 3~5years
- Environment :no mercury/no UV -radiation
- Applications: It is widely used in Hotels, Residential Building , Restaurants,shopping mall&Department Stores, Museums& Exhibitions, Airports, Offices.




Cooperation partner





6000~6500K Cool White 4000~4500K Natural White 3000~3300K Warm White

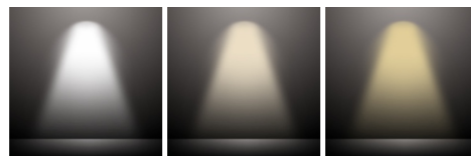

Beam Angle




125° 105°

LED COB DOWN LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-DL019-60W	85-265V	50-60Hz	0.95	Ø230	Ø200	COB	60W	49x25x50	8	0.061
OS-DL019-80W	85-265V	50-60Hz	0.95	Ø235	Ø200	COB	80W	53x27x66.5	8	0.094

Features:


- Indoor use only
- Finish:White
- Material: Die-casting Aluminium Housing with tempered glass
- Use of external isolation constant Current driver
- Working Lifetime(Hour):30000hours
- Certificate:CB,CE,ROHS,TUV,SAA,SASO
- Warranty(Years): 3~5years
- Environment :no mercury/no UV -radiation
- Applications: It is widely used in Hotels, Residential Building , Restaurants,shopping mall&Department Stores, Museums& Exhibitions, Airports, Offices.

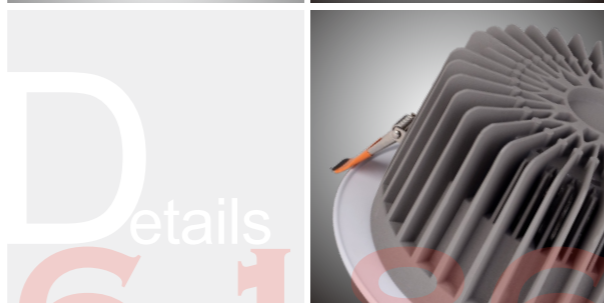


Cooperation partner



6000~6500K Cool White 4000~4500K Natural White 3000~3300K Warm White

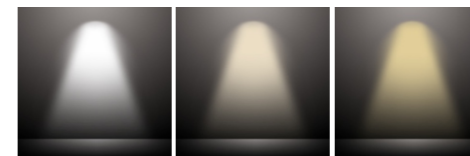

Beam Angle

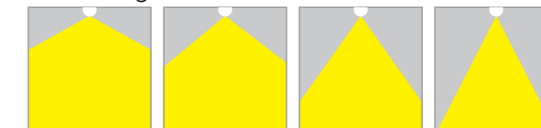

125° 105° 70° 55°

LED COB DOWN LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	Luminous Flux
OS-DL024-7W	85-265V	50-60Hz	0.5	Ø90	Ø80	COB	7W	53x50x35	100	560Lm
OS-DL024-10W	85-265V	50-60Hz	0.5	Ø120	Ø100	COB	10W	68x31.5x40	50	800Lm
OS-DL024-15W	85-265V	50-60Hz	0.5	Ø150	Ø125	COB	15W	50x39x36	20	1200Lm
OS-DL024-20W	85-265V	50-60Hz	0.5	Ø200	Ø170	COB	20W	60x51x48	20	1600Lm
OS-DL024-30W	85-265V	50-60Hz	0.95	Ø230	Ø210	COB	30W	49x25x67	10	2400Lm

Features:

- Indoor use only
- Finish:White
- Material: Die-casting Aluminium Housing with tempered glass
- Use of external isolation constant Current driver
- Working Lifetime(Hour):30000hours
- Certificate:CB,CE,ROHS,TUV,SAA,SASO
- Warranty(Years): 3~5years
- Environment :no mercury/no UV -radiation
- Applications: It is widely used in Hotels, Residential Building , Restaurants,shopping mall&Department Stores, Museums& Exhibitions, Airports, Offices.




Cooperation partner






6000~6500K Cool White
4000~4500K Natural White
3000~3300K Warm White

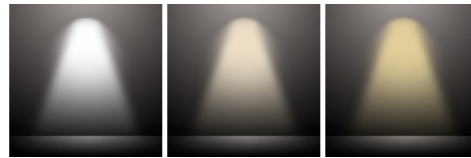

Beam Angle

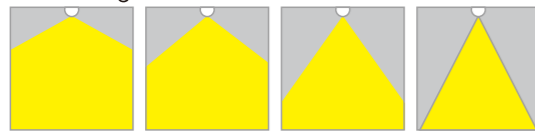

125° 105° 70° 55°

LED COB DOWN LIGHT


Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-DL034-7W	85-265V	50-60Hz	0.5	Ø90	Ø75	COB	7W	53x29.5x48	100	0.070
OS-DL034-10W	85-265V	50-60Hz	0.5	Ø115	Ø90	COB	10W	65x32x28	50	0.070
OS-DL034-10W	85-265V	50-60Hz	0.5	Ø135	Ø115	COB	10W	63x37x39	40	0.053
OS-DL034-15W	85-265V	50-60Hz	0.5	Ø165	Ø145	COB	15W	48x32x48	20	0.053
OS-DL034-20W	85-265V	50-60Hz	0.5	Ø190	Ø165	COB	20W	63x37x39	40	0.053
OS-DL034-30W	85-265V	50-60Hz	0.95	Ø220	Ø200	COB	30W	48x32x48	20	0.053

Features:


- Indoor use only
- Finish:White
- Material: Die-casting Aluminium Housing with tempered glass
- Use of external isolation constant Current driver
- Working Lifetime(Hour):30000hours
- Certificate:CB,CE,ROHS,TUV,SAA,SASO
- Warranty(Years): 3~5years
- Environment :no mercury/no UV -radiation
- Applications: It is widely used in Hotels, Residential Building , Restaurants,shopping mall&Department Stores, Museums& Exhibitions, Airports, Offices.




Cooperation partner



6000~6500K Cool White
4000~4500K Natural White
3000~3300K Warm White

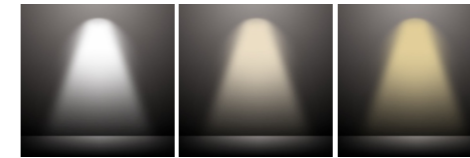

Beam Angle

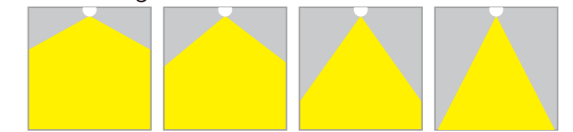

125° 105° 70° 55°

LED COB DOWN LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-DL032-7W	85-265V	50-60Hz	0.5	Ø90	Ø70	COB	7W	49x48x26	100	0.070
OS-DL032-9W	85-265V	50-60Hz	0.5	Ø90	Ø70	COB	9W	49x48x26	100	0.070
OS-DL032-10W	85-265V	50-60Hz	0.5	Ø120	Ø100	COB	10W	64x29x28	50	0.053
OS-DL032-12W	85-265V	50-60Hz	0.5	Ø120	Ø100	COB	12W	64x29x28	50	0.053
OS-DL032-15W	85-265V	50-60Hz	0.5	Ø170	Ø140	COB	15W	69.5x37.5x33	40	0.108
OS-DL032-18W	85-265V	50-60Hz	0.5	Ø170	Ø140	COB	18W	69.5x37.5x33	40	0.108
OS-DL032-30W	85-265V	50-60Hz	0.95	Ø220	Ø200	COB	30W	50.5x48x35	20	0.091
OS-DL032-36W	85-265V	50-60Hz	0.95	Ø220	Ø200	COB	36W	50.5x48x35	20	0.091

Features:

- Indoor use only
- Finish:White
- Material: Die-casting Aluminium Housing with tempered glass
- Use of external isolation constant Current driver
- Working Lifetime(Hour):30000hours
- Certificate:CB,CE,ROHS,TUV,SAA,SASO
- Warranty(Years): 3~5years
- Environment :no mercury/no UV -radiation
- Applications: It is widely used in Hotels, Residential Building , Restaurants,shopping mall&Department Stores, Museums& Exhibitions, Airports, Offices.




Cooperation partner






6000~6500K Cool White 4000~4500K Natural White 3000~3300K Warm White

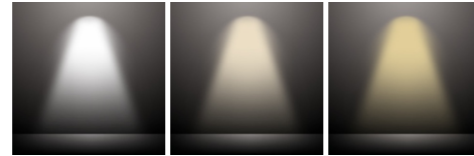

Beam Angle




125° 105° 70° 55°

LED COB DOWN LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Luminous Flux
OS-DL020-9W	85-265V	50-60Hz	0.5	Ø100	Ø75	COB	9W	720Lm
OS-DL020-12W	85-265V	50-60Hz	0.5	Ø115	Ø95	COB	12W	960Lm
OS-DL020-18W	85-265V	50-60Hz	0.5	Ø140	Ø120	COB	18W	1440Lm
OS-DL020-25W	85-265V	50-60Hz	0.5	Ø160	Ø140	COB	25W	2000Lm
OS-DL020-30W	85-265V	50-60Hz	0.95	Ø195	Ø170	COB	30W	2400Lm
OS-DL020-40W	85-265V	50-60Hz	0.95	Ø225	Ø200	COB	40W	3200Lm

Features:


- Indoor use only
- Finish:White
- Material: Die-casting Aluminium Housing with tempered glass
- Use of external isolation constant Current driver
- Working Lifetime(Hour):30000hours
- Certificate:CB,CE,ROHS,TUV,SAA,SASO
- Warranty(Years): 3~5years
- Environment :no mercury/no UV -radiation
- Applications: It is widely used in Hotels, Residential Building , Restaurants,shopping mall&Department Stores, Museums& Exhibitions, Airports, Offices.

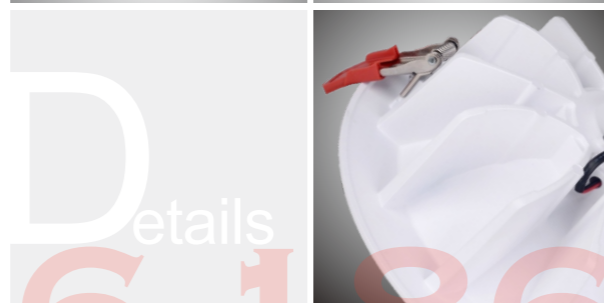


Cooperation partner



6000~6500K Cool White 4000~4500K Natural White 3000~3300K Warm White

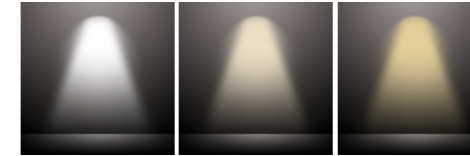

Beam Angle

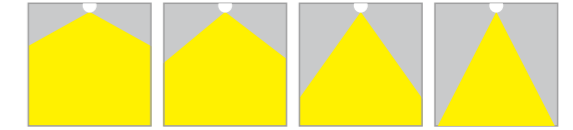

125° 105° 70° 55°

LED SMD DOWN LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Luminous Flux
OS-DL038-7W	85-265V	50-60Hz	0.5	Ø85x45	Ø75	COB	7W	550Lm
OS-DL038-9W	85-265V	50-60Hz	0.5	Ø105x55	Ø90	COB	9W	720Lm
OS-DL038-12W	85-265V	50-60Hz	0.5	Ø130x55	Ø105	COB	12W	960Lm
OS-DL038-30W	85-265V	50-60Hz	0.95	Ø185x55	Ø155	COB	30W	2400Lm
OS-DL038-40W	85-265V	50-60Hz	0.95	Ø225x55	Ø180	COB	40W	3200Lm

Features:

- Indoor use only
- Finish:White
- Material: Die-casting Aluminium Housing with tempered glass
- Use of external isolation constant Current driver
- Working Lifetime(Hour):30000hours
- Certificate:CB,CE,ROHS,TUV,SAA,SASO
- Warranty(Years): 3~5years
- Environment :no mercury/no UV -radiation
- Applications: It is widely used in Hotels, Residential Building , Restaurants,shopping mall&Department Stores, Museums& Exhibitions, Airports, Offices.




Cooperation partner




+86-18680577977



6000~6500K Cool White 4000~4500K Natural White 3000~3300K Warm White

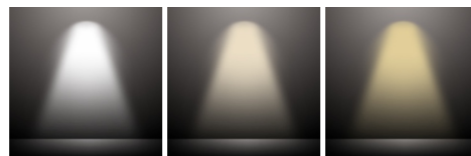

Beam Angle

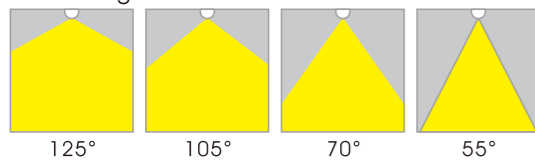

LED COB DOWN LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Luminous Flux
OS-DL040-10W	85-265V	50-60Hz	0.5	Ø115x65	Ø100	COB	10W	700Lm
OS-DL040-20W	85-265V	50-60Hz	0.5	Ø140x80	Ø125	COB	20W	1600Lm
OS-DL040-30W	85-265V	50-60Hz	0.95	Ø160x85	Ø145	COB	30W	2400Lm
OS-DL040-40W	85-265V	50-60Hz	0.95	Ø198x98	Ø180	COB	40W	3200Lm
OS-DL040-50W	85-265V	50-60Hz	0.95	Ø230x102	Ø215	COB	50W	4000Lm


Features:

- Indoor use only
- Finish:White
- Material: Die-casting Aluminium Housing with tempered glass
- Use of external isolation constant Current driver
- Working Lifetime(Hour):30000hours
- Certificate:CB,CE,ROHS,TUV,SAA,SASO
- Warranty(Years): 3~5years
- Environment :no mercury/no UV -radiation
- Applications: It is widely used in Hotels, Residential Building , Restaurants,shopping mall&Department Stores, Museums& Exhibitions, Airports, Offices.


Cooperation partner



6000~6500K Cool White 4000~4500K Natural White 3000~3300K Warm White

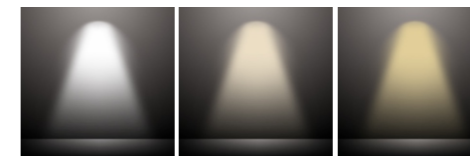

Beam Angle

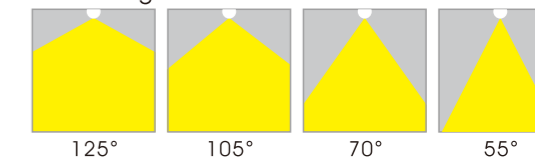

LED COB DOWN LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Luminous Flux
OS-DL041-10W	85-265V	50-60Hz	0.5	115x115x60	100x100	COB	10W	700Lm
OS-DL041-20W	85-265V	50-60Hz	0.5	140x140x75	125x125	COB	20W	1600Lm
OS-DL041-30W	85-265V	50-60Hz	0.95	160x160x80	145x145	COB	30W	2400Lm
OS-DL041-40W	85-265V	50-60Hz	0.95	195x195x95	180x180	COB	40W	3200Lm

Features:


- Indoor use only
- Finish:White
- Material: Die-casting Aluminium Housing with tempered glass
- Use of external isolation constant Current driver
- Working Lifetime(Hour):30000hours
- Certificate:CB,CE,ROHS,TUV,SAA,SASO
- Warranty(Years): 3~5years
- Environment :no mercury/no UV -radiation
- Applications: It is widely used in Hotels, Residential Building , Restaurants,shopping mall&Department Stores, Museums& Exhibitions, Airports, Offices.

Cooperation partner






6000~6500K Cool White 4000~4500K Natural White 3000~3300K Warm White

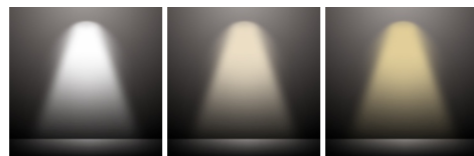

Beam Angle

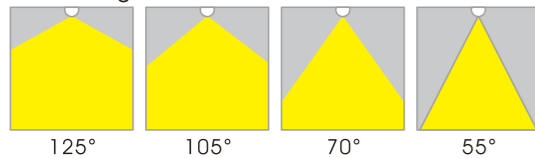


LED COB DOWN LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Luminous Flux
OS-DL042-12W	85-265V	50-60Hz	0.5	Ø85x70	Ø75	COB	12W	840Lm
OS-DL042-20W	85-265V	50-60Hz	0.5	Ø108x85	Ø95	COB	20W	1400Lm
OS-DL042-35W	85-265V	50-60Hz	0.95	Ø135x97	Ø125	COB	35W	2450Lm

Features:


- Indoor use only
- Finish: White
- Material: Die-casting Aluminium Housing with tempered glass
- Use of external isolation constant Current driver
- Working Lifetime(Hour): 30000hours
- Certificate: CB, CE, ROHS, TUV, SAA, SASO
- Warranty(Years): 3~5years
- Environment: no mercury/no UV -radiation
- Applications: It is widely used in Hotels, Residential Building, Restaurants, shopping mall & Department Stores, Museums & Exhibitions, Airports, Offices.

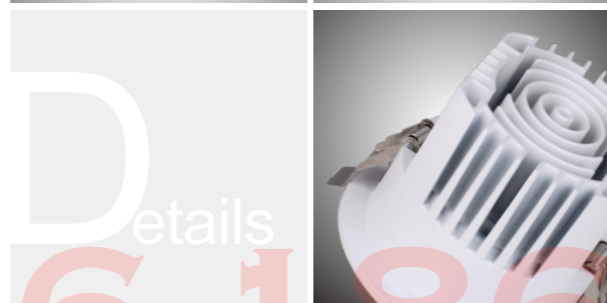

Cooperation partner




6000~6500K Cool White 4000~4500K Natural White 3000~3300K Warm White

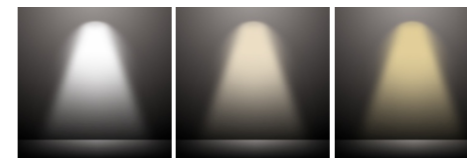


Model	Voltage	Frequency	Power	Power Factor	Dimensions (mm)	LED	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-HT001-5W	85-265V	50-60Hz	5W	≥0.5	Ø70	COB	43x34x29.5	100	0.043
OS-HT001-7W	85-265V	50-60Hz	7W	≥0.5	Ø90	COB	48x39x36	100	0.067
OS-HT001-10W	85-265V	50-60Hz	10W	≥0.5	Ø115	COB	61x25x47	50	0.071
OS-HT001-20W	85-265V	50-60Hz	20W	≥0.5	Ø135	COB	58x30x47	40	0.081

6000~6500K Cool White 4000~4500K Natural White 3000~3300K Warm White

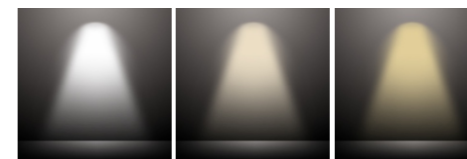

Model	Voltage	Frequency	Power	Power Factor	Dimensions(mm)	LED	Luminous Flux
OS-HT002-7W	85-265V	50-60Hz	7W	≥0.5	Ø60x75	COB	550Lm
OS-HT002-10W	85-265V	50-60Hz	10W	≥0.5	Ø75x100	COB	800Lm
OS-HT002-18W	85-265V	50-60Hz	18W	≥0.5	Ø100x100	COB	1440Lm
OS-HT002-24W	85-265V	50-60Hz	24W	≥0.5	Ø120x120	COB	1920Lm
OS-HT002-30W	85-265V	50-60Hz	30W	≥0.5	Ø138x153	COB	2400Lm

6000~6500K Cool White 4000~4500K Natural White 3000~3300K Warm White

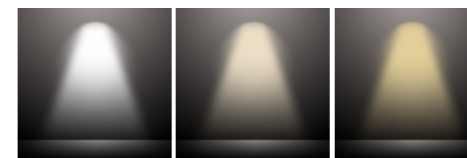

Model	Voltage	Frequency	Power	Power Factor	Dimensions(mm)	LED	Luminous Flux
OS-HT003-10W	85-265V	50-60Hz	10W	≥0.5	Ø90x90	COB	800Lm
OS-HT003-20W	85-265V	50-60Hz	20W	≥0.5	Ø110x120	COB	1600Lm
OS-HT003-30W	85-265V	50-60Hz	30W	≥0.5	Ø130x150	COB	2400Lm
OS-HT003-40W	85-265V	50-60Hz	40W	≥0.5	Ø170x185	COB	3200Lm
OS-HT003-50W	85-265V	50-60Hz	50W	≥0.5	Ø195x195	COB	4000Lm



LINE LAMP

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-DL032-2W	85-265V	50-60Hz	0.5	Ø90	Ø70	COB	2W	49x48x26	100	0.061
OS-DL032-4W	85-265V	50-60Hz	0.5	Ø90	Ø70	COB	4W	49x48x26	100	0.061
OS-DL032-10W	85-265V	50-60Hz	0.5	Ø120	Ø100	COB	10W	64x29x28	50	0.051
OS-DL032-20W	85-265V	50-60Hz	0.5	Ø120	Ø100	COB	20W	64x29x28	50	0.051
OS-DL032-30W	85-265V	50-60Hz	0.5	Ø170	Ø140	COB	30W	69.5x37.5x33	40	0.086
OS-DL032-20W	85-265V	50-60Hz	0.5	Ø170	Ø140	COB	20W	69.5x37.5x33	40	0.086
OS-DL032-40W	85-265V	50-60Hz	0.95	Ø220	Ø200	COB	40W	50.5x48x35	20	0.084
OS-DL032-60W	85-265V	50-60Hz	0.95	Ø220	Ø200	COB	60W	50.5x48x35	20	0.084

Cooperation partner



LED PANEL LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-PL001-3W	85-265V	50-60Hz	0.5	Ø90	Ø70	COB	3W	52x33x30	100	0.051
OS-PL001-6W	85-265V	50-60Hz	0.5	Ø120	Ø100	COB	6W	67.5x33x34	100	0.075
OS-PL001-9W	85-265V	50-60Hz	0.5	Ø145	Ø130	COB	9W	50x33x40	60	0.066
OS-PL001-12W	85-265V	50-60Hz	0.5	Ø160	Ø140	COB	12W	35x33x41	40	0.047
OS-PL001-15W	85-265V	50-60Hz	0.5	Ø195	Ø180	COB	15W	45x30x25	20	0.033
OS-PL001-18W	85-265V	50-60Hz	0.5	Ø225	Ø205	COB	18W	48x33x29.5	20	0.046
OS-PL001-24W	85-265V	50-60Hz	0.5	Ø300	Ø280	COB	24W	48x33x29.5	10	0.046



LED PANEL LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-PL002-3W	85-265V	50-60Hz	0.5	90x90	70x70	COB	3W	52x33x30	100	0.051
OS-PL002-6W	85-265V	50-60Hz	0.5	120x120	100x100	COB	6W	67.5x33x34	100	0.075
OS-PL002-9W	85-265V	50-60Hz	0.5	145x145	130x130	COB	9W	50x33x40	60	0.066
OS-PL002-12W	85-265V	50-60Hz	0.5	170x170	155x155	COB	12W	39x33x45	40	0.057
OS-PL002-15W	85-265V	50-60Hz	0.5	195x195	180x180	COB	15W	45x30x25	20	0.033
OS-PL002-18W	85-265V	50-60Hz	0.5	225x225	205x205	COB	18W	48x33x29.5	20	0.046
OS-PL002-24W	85-265V	50-60Hz	0.5	300x300	280x280	COB	24W	48x33x29.5	10	0.046



LED PANEL LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-PL003-6W	85-265V	50-60Hz	0.5	Ø120	/	COB	6W	53x28x28	40	0.041
OS-PL003-12W	85-265V	50-60Hz	0.5	Ø170	/	COB	12W	53x39x39	40	0.080
OS-PL003-18W	85-265V	50-60Hz	0.5	Ø225	/	COB	18W	48x27x48	20	0.062
OS-PL003-24W	85-265V	50-60Hz	0.5	Ø300	/	COB	24W	64x27x33	10	0.057
OS-PL003-30W	85-265V	50-60Hz	0.95	Ø300	/	COB	30W	64x27x33	10	0.057
OS-PL003-36W	85-265V	50-60Hz	0.95	Ø400	/	COB	36W	43x24x43.5	5	0.044
OS-PL003-36W	85-265V	50-60Hz	0.95	Ø500	/	COB	36W	56x22x56	5	0.068
OS-PL003-48W	85-265V	50-60Hz	0.95	Ø600	/	COB	48W	62.5x25x63	5	0.098



LED PANEL LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-PL009-6W	85-265V	50-60Hz	0.5	Ø120	/	COB	6W	53x28x28	40	0.041
OS-PL009-12W	85-265V	50-60Hz	0.5	Ø170	/	COB	12W	53x39x39	40	0.080
OS-PL009-18W	85-265V	50-60Hz	0.5	Ø225	/	COB	18W	48x27x48	20	0.062
OS-PL009-24W	85-265V	50-60Hz	0.5	Ø300	/	COB	24W	64x27x33	10	0.057
OS-PL009-30W	85-265V	50-60Hz	0.75	Ø300	/	COB	30W	64x27x33	10	0.057



LED PANEL LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-PL010-18W	85-265V	50-60Hz	0.5	Ø170	/	COB	18W	53x38x20	20	0.040
OS-PL010-30W	85-265V	50-60Hz	0.75	Ø225	/	COB	30W	48x27x48	20	0.062
OS-PL010-36W	85-265V	50-60Hz	0.75	Ø300	/	COB	36W	64x30x33	10	0.063
OS-PL010-40W	85-265V	50-60Hz	0.75	Ø300	/	COB	40W	64x30x33	10	0.063



LED PANEL LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-PL014-6W	85-265V	50-60Hz	0.5	90x90	70x70	COB	6W	66.5x20x40.5	100	0.053
OS-PL014-12W	85-265V	50-60Hz	0.5	145x145	120x120	COB	12W	77.5x20x38.5	50	0.059
OS-PL014-18W	85-265V	50-60Hz	0.5	175x175	150x150	COB	18W	39x23.5x37.5	20	0.034
OS-PL014-24W	85-265V	50-60Hz	0.5	225x225	200x200	COB	24W	39x28x47.5	20	0.051



LED PANEL LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-PL016-6W	85-265V	50-60Hz	0.5	90x90	/	COB	6W	66.5x20x40.5	100	0.053
OS-PL016-12W	85-265V	50-60Hz	0.5	145x145	/	COB	12W	43x32x32	40	0.044
OS-PL016-18W	85-265V	50-60Hz	0.5	175x175	/	COB	18W	43x38x38	40	0.062
OS-PL016-24W	85-265V	50-60Hz	0.5	225x225	/	COB	24W	48x22x48	20	0.050



LED PANEL LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-PL029-3W	85-265V	50-60Hz	0.5	Ø70	Ø50	COB	3W	58x43x24	100	0.059
OS-PL029-7W	85-265V	50-60Hz	0.5	Ø100	Ø75	COB	7W	55x24.5x48	100	0.064
OS-PL029-9W	85-265V	50-60Hz	0.5	Ø110	Ø85	COB	9W	67.5x33x34	100	0.075
OS-PL029-12W	85-265V	50-60Hz	0.5	Ø120	Ø95	COB	12W	68x33x34	100	0.076
OS-PL029-15W	85-265V	50-60Hz	0.5	Ø145	Ø120	COB	15W	77.5x20x38.5	50	0.059
OS-PL029-18W	85-265V	50-60Hz	0.5	Ø170	Ø145	COB	18W	48x37x48	40	0.085
OS-PL029-24W	85-265V	50-60Hz	0.5	Ø180	Ø160	COB	24W	45.5x43x42	40	0.082
OS-PL029-30W	85-265V	50-60Hz	0.95	Ø230	Ø200	COB	30W	49x24.5x49	20	0.058



LED PANEL LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-PLE003-6W	85-265V	50-60Hz	0.5	110x110	/	COB	6W	53x28x28	40	0.041
OS-PLE003-12W	85-265V	50-60Hz	0.5	160x160	/	COB	12W	53x39x39	40	0.080
OS-PLE003-18W	85-265V	50-60Hz	0.5	210x210	/	COB	18W	48x27x48	20	0.062
OS-PLE003-24W	85-265V	50-60Hz	0.5	290x290	/	COB	24W	64x27x33	10	0.057
OS-PLE003-30W	85-265V	50-60Hz	0.75	290x290	/	COB	30W	64x27x33	10	0.057

+86-18680577977



LED PANEL LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-1806-6W	85-265V	50-60Hz	0.5	Ø100	Ø50-90	COB	6W	54.5x29x23	100	0.036
OS-1806-8W	85-265V	50-60Hz	0.5	Ø118	Ø50-105	COB	8W	64.5x29x26.5	100	0.049
OS-1806-15W	85-265V	50-60Hz	0.5	Ø175	Ø50-165	COB	15W	57x37x19.5	40	0.041
OS-1806-20W	85-265V	50-60Hz	0.5	Ø230	Ø50-220	COB	20W	48x29x25	20	0.034



LED PANEL LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-PLE004-6W	85-265V	50-60Hz	0.5	Ø90	/	COB	6W	52x34.5x22	50	0.039
OS-PLE004-12W	85-265V	50-60Hz	0.5	Ø120	/	COB	12W	68x28x28	40	0.053
OS-PLE004-18W	85-265V	50-60Hz	0.5	Ø180	/	COB	18W	40x34.5x40	20	0.055
OS-PLE004-24W	85-265V	50-60Hz	0.5	Ø220	/	COB	24W	48x34.5x24.5	10	0.040
OS-PLE004-30W	85-265V	50-60Hz	0.95	Ø220	/	COB	30W	48x34.5x24.5	10	0.040
OS-PLE004-36W	85-265V	50-60Hz	0.95	Ø300	/	COB	36W	64x27x33	10	0.057




OS-DPL002

OS-DPL002-SQ

LED SMD DOWN LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-DPL002-6W	85-265V	50-60Hz	0.5	Ø90	Ø70	COB	6W	55x29.5x50	100	0.081
OS-DPL002-12W	85-265V	50-60Hz	0.5	Ø120	Ø105	COB	12W	65x29.5x34	50	0.065
OS-DPL002-18W	85-265V	50-60Hz	0.5	Ø170	Ø155	COB	18W	68x37x43	40	0.108
OS-DPL002-24W	85-265V	50-60Hz	0.5	Ø225	Ø205	COB	24W	48x39.5x52	20	0.098
OS-DPL002-32W	85-265V	50-60Hz	0.95	Ø225	Ø205	COB	32W	48x39.5x52	20	0.098
OS-DPL002-SQ-6W	85-265V	50-60Hz	0.5	90x90	70x70	COB	6W	55x29.5x50	100	0.081
OS-DPL002-SQ-12W	85-265V	50-60Hz	0.5	120x120	105x105	COB	12W	65x29.5x34	50	0.065
OS-DPL002-SQ-18W	85-265V	50-60Hz	0.5	170x170	155x155	COB	18W	68x37x43	40	0.108
OS-DPL002-SQ-24W	85-265V	50-60Hz	0.5	225x225	205x205	COB	24W	48x39.5x52	20	0.098

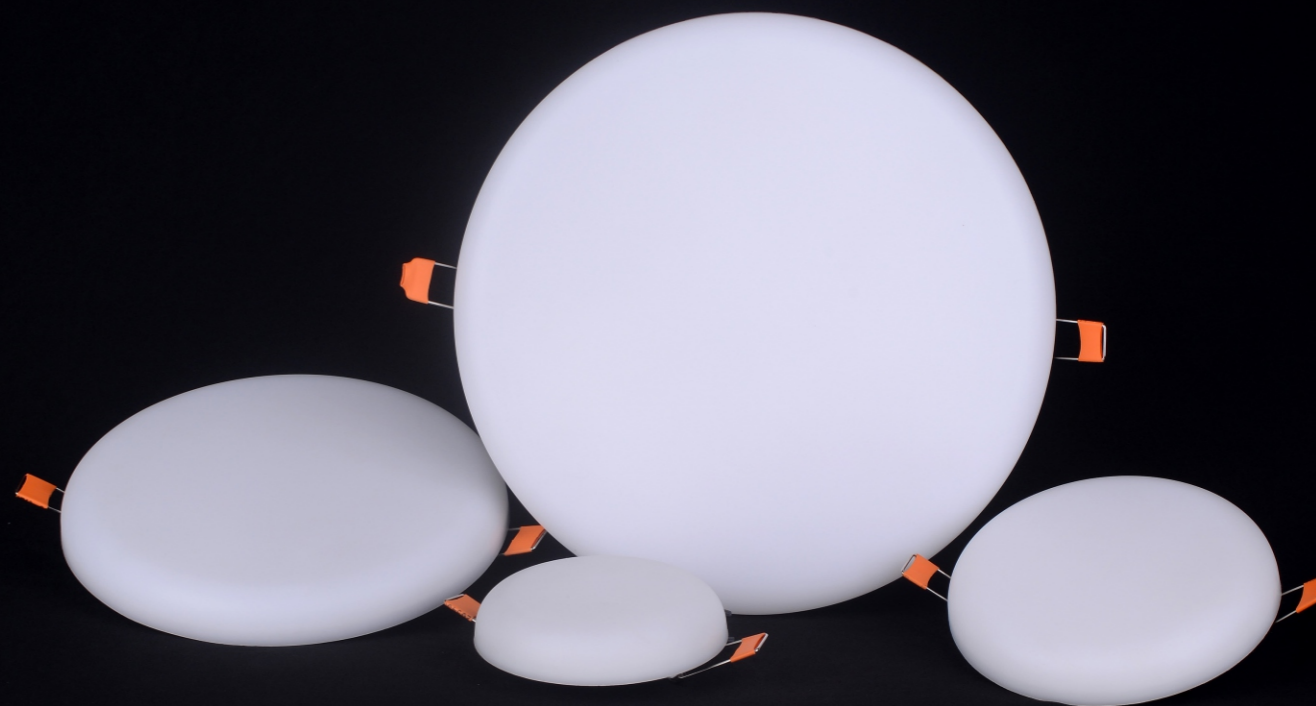

White

LED PANEL LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	Cutout (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
OS-PL030-7W	85-265V	50-60Hz	0.5	Ø90	Ø70	SMD2835	7W	52x24.5x48	100	0.039
OS-PL030-12W	85-265V	50-60Hz	0.5	Ø120	Ø105	SMD2835	12W	68x33x34	100	0.053
OS-PL030-22W	85-265V	50-60Hz	0.5	Ø173	Ø155	SMD2835	22W	48x37x48	40	0.055
OS-PL030-30W	85-265V	50-60Hz	0.95	Ø225	Ø205	SMD2835	30W	49x24.5x49	20	0.040

LED PANEL LIGHT



OS-PL005 OS-PL006 OS-PFL001 OS-PFL002 OS-PFL003

POWER	DETAIL	DIAMETER(HIGH*CUTSIZE)mm	LED COLOR
3+3W	85-265V ,50/60Hz , Constant current driver, Life time 30000 hours, Die casting Aluminum heat radiator + milky white diffuser.	Ø105x30x75	WH+BLUE WH+RED WH+GREEN WH+PINK WHITE+WARM WHITE
6+3W		Ø145x30x115	
12+4W		Ø195x30x155	
18+6W		Ø240x30x210	



OS-PFL004 OS-PFL005 OS-PFL006 OS-PFL007 OS-PFL009

POWER	DETAIL	DIAMETER(HIGH*CUTSIZE)mm	LED COLOR
3+3W	85-265V ,50/60Hz , Constant current driver, Life time 30000 hours, Die casting Aluminum heat radiator + milky white diffuser.	Ø120x30x75	WH+BLUE WH+RED WH+GREEN WH+PINK WHITE+WARM WHITE
6+3W		Ø155x30x115	
12+4W		Ø205x30x155	
18+6W		Ø255x30x210	




OS-PFL0010 OS-PFL011 OS-305-3+3+3W OS-306-3+3+3W OS-307-3+3+3W

POWER	DETAIL	DIAMETER(HIGH*CUTSIZE)mm	LED COLOR
3+3W	85-265V ,50/60Hz , Constant current driver, Life time 30000 hours, Die casting Aluminum heat radiator + milky white diffuser.	Ø120x30x75	WH+BLUE WH+RED WH+GREEN WH+PINK WHITE+WARM WHITE
6+3W		Ø155x30x115	
12+4W		Ø205x30x155	
18+6W		Ø255x30x210	


LED Outdoor Moisture Proof Lamp

OS-FC001

POWER:15W/20W
AC110-240V
CRI>80
Lumen:90LM
Lamp Size:215x115mm/270x145mm
LED Type:SMD2835

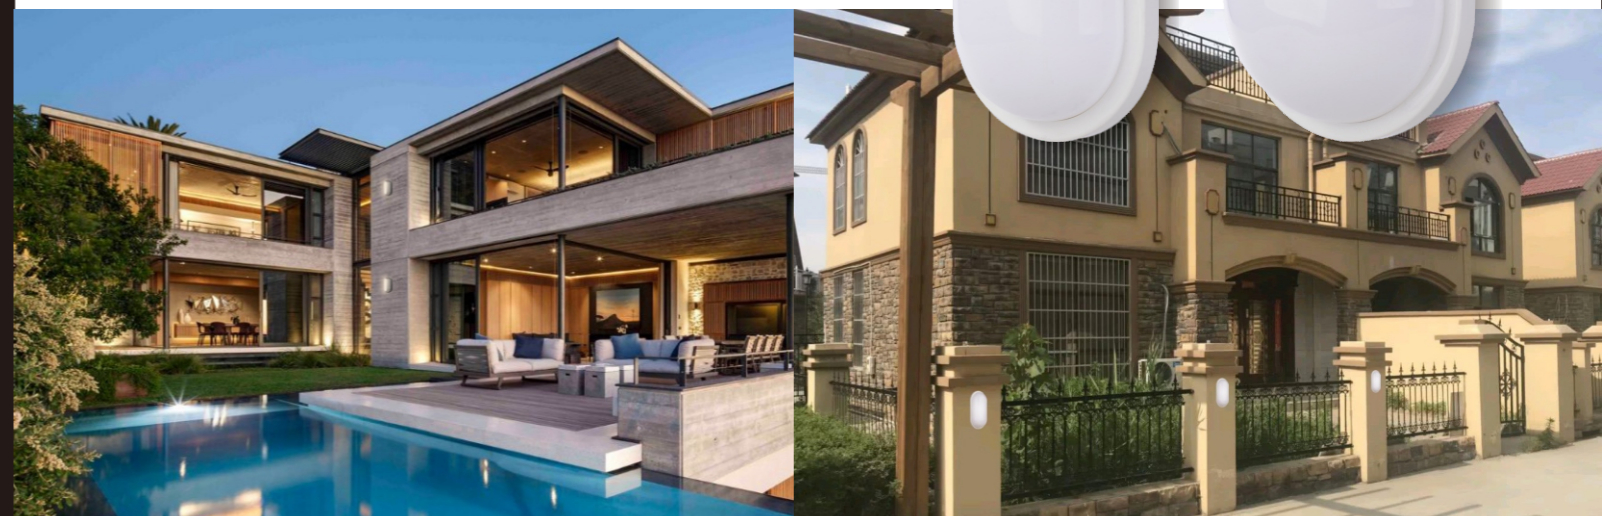

OS-FC004 OS-FC005 OS-FC909

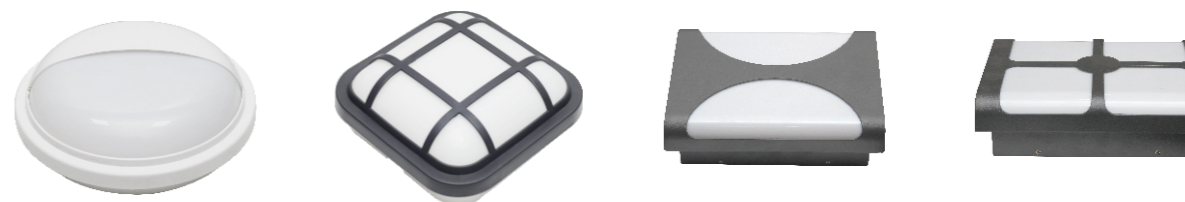

OS-FC006 OS-FC009 OS-FC907 OS-FC908



OS-FC910 OS-FC002 OS-FC007


LED CUP LIGHT



OS-CL001
POWER:5W/7W/9W



OS-CL002
POWER:5W/7W/9W

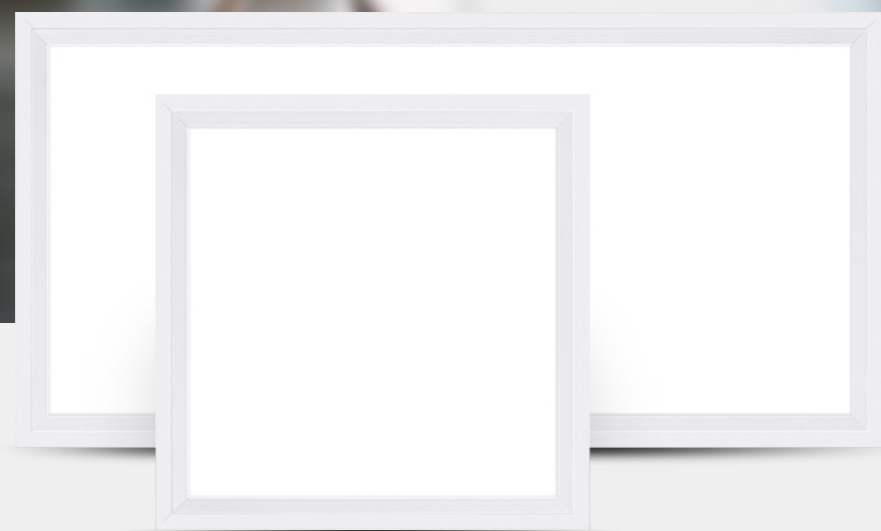

LED FLAT PANEL LIGHT

Model	Voltage	Power	SIZE(mm)	Cut size(mm)	Chips	Carton size	CTNS/PCS
OS-FT001	85~265V	24W	295x295	285x285	SMD4014/2835	64.5x33x36.5	20
OS-FT001	85~265V	24W	295x595	285x585	SMD4014/2835	65x31x33.5	10
OS-FT001	85~265V	36W	595x595	585x585	SMD4014/2835	67.5x20x64.5	10
OS-FT001	85~265V	48W	595x595	585x585	SMD4014/2835	67.5x20x64.5	10
OS-FT001	85~265V	60W	595x595	585x585	SMD4014/2835	67.5x20x64.5	10
OS-FT001	85~265V	72W	595x595	585x585	SMD4014/2835	67.5x20x64.5	10
OS-FT001	85~265V	36W	295x1195	285x1185	SMD4014/2835	129x20x36	10
OS-FT001	85~265V	48W	295x1195	285x1185	SMD4014/2835	129x20x36	10
OS-FT001	85~265V	72W	595x1195	585x1185	SMD4014/2835	128.5x22.5x64.5	5



C35 C35T G45 A60 ST64 ST80


Model	Voltage	Frequency	Power Factor	Power	Dimensions (mm)	Packing Size (L*W*H)cm	CTNS/PCS	CTNS/CBM
C35-4W	220~240V	50~60Hz	0.5	4W	35x95	39x20x28	100	0.022
C35-6W	85~265V	50~60Hz	0.5	6W	35x95	39x20x28	100	0.022
C35T-4W	85~265V	50~60Hz	0.5	4W	35x115	39x20x28	100	0.022
C35T-6W	85~265V	50~60Hz	0.5	6W	35x115	39x20x28	100	0.022
G45-4W	85~265V	50~60Hz	0.5	4W	45x70	26.5x26.5x38	100	0.027
G45-6W	85~265V	50~60Hz	0.5	6W	45x70	26.5x26.5x38	100	0.027
A60-4W	85~265V	50~60Hz	0.5	4W	60x108	34x34x26.5	50	0.031
A60-6W	85~265V	50~60Hz	0.5	6W	60x108	34x34x26.5	50	0.031
A60-8W	85~265V	50~60Hz	0.5	8W	60x108	34x34x26.5	50	0.031
ST64-4W	85~265V	50~60Hz	0.5	4W	64x140	42x42x36	50	0.064
ST64-6W	85~265V	50~60Hz	0.5	6W	64x140	42x42x36	50	0.064
ST64-8W	85~265V	50~60Hz	0.5	8W	64x140	42x42x36	50	0.064
G80-8W	85~265V	50~60Hz	0.5	8W	80x118	53x53x33	50	0.093
G95-8W	85~265V	50~60Hz	0.5	8W	95x138	59.5x59.5x37	50	0.131
G125-8W	85~265V	50~60Hz	0.5	8W	125x176	74.5x30.5x43	20	0.098

+86-18680577977



LED FLOOD LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS
OS-FL8002	85-265V	50-60Hz	0.95	235x230x50	2835	50W	27x25.5x27	5
OS-FL8002	85-265V	50-60Hz	0.95	310x270x50	2835	100W	55x31x37.5	10
OS-FL8002	85-265V	50-60Hz	0.95	360x180x55.5	2835	150W	35x34x45.5	5
OS-FL8002	85-265V	50-60Hz	0.95	355x170x55	2835	200W	36x34x55.5	5

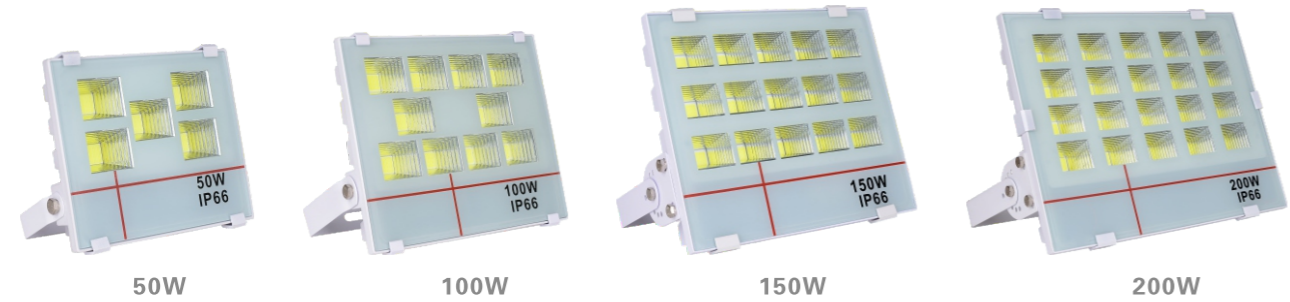

LED FLOOD LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS
OS-FL8004	85-265V	50-60Hz	0.95	218x180x60	2835	50W	51x34.5x23.5	10
OS-FL8004	85-265V	50-60Hz	0.95	275x227x62	2835	100W	38x32x29	5
OS-FL8004	85-265V	50-60Hz	0.95	330x280x70	2835	150W	39x32x11.5	1
OS-FL8004	85-265V	50-60Hz	0.95	420x320x73	2835	200W	48.5x37x11.5	1
OS-FL8004	85-265V	50-60Hz	0.95	450.7x377.7x69.5	2835	300W	48.5x43x13	1



LED FLOOD LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS
OS-FL8005	85-265V	50-60Hz	0.5	112x113x35	2835	10W	62.5x22.5x26	50
OS-FL8005	85-265V	50-60Hz	0.95	243x143x40	2835	30W	56x32x26.5	20
OS-FL8005	85-265V	50-60Hz	0.95	276x201x45	2835	50W	59x29.5x44.5	20
OS-FL8005	85-265V	50-60Hz	0.95	340x283x54	2835	100W	50x36x34	6
OS-FL8005	85-265V	50-60Hz	0.95	496x283x54	2835	150W	35.5x34.5x52	4
OS-FL8005	85-265V	50-60Hz	0.95	526x329x54	2835	200W	39x35.5x55	4



LED FLOOD LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS
OS-FL8006	85-265V	50-60Hz	0.95	285x235x160	COB	50W	51x31.5x34	4
OS-FL8006	85-265V	50-60Hz	0.95	335x235x180	COB	100W	39.5x29.5x20	1
OS-FL8006	85-265V	50-60Hz	0.95	385x285x185	COB	150W	39.5x29.5x20	1
OS-FL8006	85-265V	50-60Hz	0.95	385x285x185	COB	200W	44x33x23	1
OS-FL8006	85-265V	50-60Hz	0.95	520x325x190	COB	300W	46x33x23	1
OS-FL8006	85-265V	50-60Hz	0.95	520x325x190	COB	400W	54x34x23	1
OS-FL8006	85-265V	50-60Hz	0.95	665x325x240	COB	500W	61x34x23	1
OS-FL8006	85-265V	50-60Hz	0.95	805x325x260	COB	600W	82x33x23	1



LED FLOOD LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS
OS-FL8007	85-265V	50-60Hz	0.95	230x200x40	2835	30W	53x24.5x25.5	10
OS-FL8007	85-265V	50-60Hz	0.95	270x230x45	2835	50W	53x28.5x25.5	10
OS-FL8007	85-265V	50-60Hz	0.95	330x270x50	2835	100W	37x34.5x29	6
OS-FL8007	85-265V	50-60Hz	0.95	383x347x50	2835	150W	39.5x25.5x37	4
OS-FL8007	85-265V	50-60Hz	0.95	432x390x50	2835	200W	44.5x26x40.5	4



LED FLOOD LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS
OS-FL8008	85-265V	50-60Hz	0.95	218x180x68	2835	50W	35x25.5x42	10
OS-FL8008	85-265V	50-60Hz	0.95	275x227x73	2835	100W	50x36x34	6
OS-FL8008	85-265V	50-60Hz	0.95	330x280x83	2835	150W	44x36.5x33.5	4
OS-FL8008	85-265V	50-60Hz	0.95	420x320x88	2835	200W	47x23x37.5	2
OS-FL8008	85-265V	50-60Hz	0.95	450x377.7x69.5	2835	300W	49.5x27.5x45.5	2



LED FLOOD LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS
OS-FL8003	85-265V	50-60Hz	0.95	228x192x56	2835	50W	43x25x45.5	10
OS-FL8003	85-265V	50-60Hz	0.95	288x243x62	2835	100W	54.5x31x28.5	6
OS-FL8003	85-265V	50-60Hz	0.95	350x284x75	2835	150W	36.5x31.5x10	1
OS-FL8003	85-265V	50-60Hz	0.95	423x323x80	2835	200W	46.5x36x12.5	1
OS-FL8003	85-265V	50-60Hz	0.95	460x375x85	2835	300W	50x41x12.5	1
OS-FL8003	85-265V	50-60Hz	0.95	565x382x95	2835	400W	60x41x12.5	1
OS-FL8003	85-265V	50-60Hz	0.95	690x378x95	2835	500W	71x41.5x12.5	1



LED FLOOD LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS
OS-FL019	85-265V	50-60Hz	0.5	130x110x40	2835	10W	67.5x31x35	50
OS-FL019	85-265V	50-60Hz	0.5	176x155x55	2835	20W	39x32.5x46	20
OS-FL019	85-265V	50-60Hz	0.95	207x246x70	2835	30W	42.5x38x51	20
OS-FL019	85-265V	50-60Hz	0.95	229x295x72	2835	50W	47x37x31	10
OS-FL019	85-265V	50-60Hz	0.95	286x334x96	2835	100W	45x29.5x35.5	5
OS-FL019	85-265V	50-60Hz	0.95	350x410x84	2835	150W	41.5x35x12	1
OS-FL019	85-265V	50-60Hz	0.95	350x410x95	2835	200W	41.5x35x13.5	1
OS-FL019	85-265V	50-60Hz	0.95	420x315x95	2835	300W	53x44x14	1




LED FLOOD LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS
OS-FL8009	85-265V	50-60Hz	0.95	230x200x40	2835	30W	53x24.5x25.5	10
OS-FL8009	85-265V	50-60Hz	0.95	250x230x50	2835	50W	53x28.5x25.5	10
OS-FL8009	85-265V	50-60Hz	0.95	255x340x50	2835	100W	65x32x36	10
OS-FL8009	85-265V	50-60Hz	0.95	370x350x50	2835	150W	42x32x40.5	5
OS-FL8009	85-265V	50-60Hz	0.95	470x360x50	2835	200W	40x34.5x53.5	5



LED FLOOD LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS
OS-FL024	85-265V	50-60Hz	0.95	274x224x80	2835	50W	53.5x47x41	20
OS-FL024	85-265V	50-60Hz	0.95	325x246x84	2835	100W	65.6x34x30	10
OS-FL024	85-265V	50-60Hz	0.95	420x320x92	2835	150W	51.5x41x34	5
OS-FL024	85-265V	50-60Hz	0.95	420x320x92	2835	200W	45x33.5x12	1
OS-FL024	85-265V	50-60Hz	0.95	526x345x100	2835	300W	54x36x12.5	1
OS-FL024	85-265V	50-60Hz	0.95	626x360x104	2835	400W	64x37x13.5	1
OS-FL024	85-265V	50-60Hz	0.95	750x360x100	2835	500W	84.5x37x13.5	1
OS-FL024	85-265V	50-60Hz	0.95	890x360x100	2835	600W	92.5x37x13.5	1

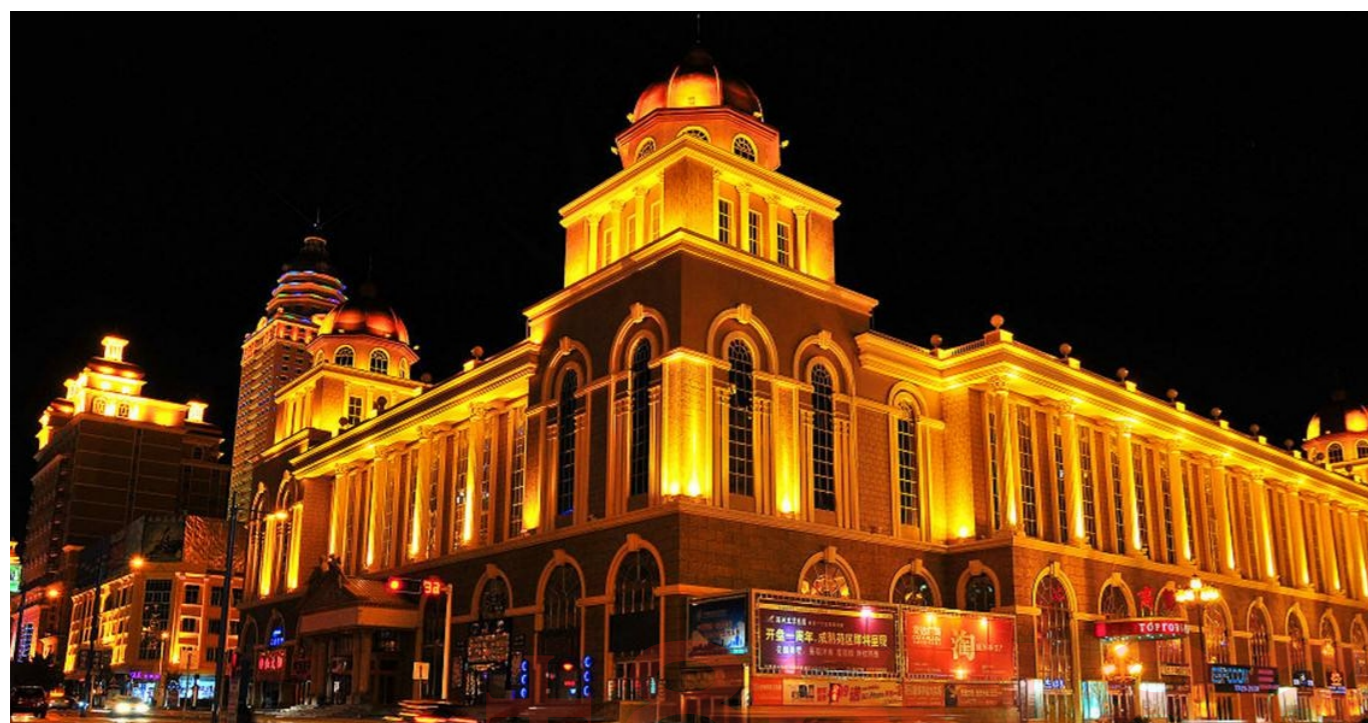

LED STREET LIGHT

Model	Voltage	Frequency	Power Factor	Power	Dimensions(mm)	LED
OS-ST020	85-265V	50-60Hz	0.5	20W	300x105x47	SMD
OS-ST020	85-265V	50-60Hz	0.95	30W	340x125x47	SMD
OS-ST020	85-265V	50-60Hz	0.95	50W	390x146x51	SMD
OS-ST020	85-265V	50-60Hz	0.95	100W	452x172x58	SMD




LED STREET LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS
OS-ST001	85-265V	50-60Hz	0.95	510x220x70	COB	50W	53x23x7	1
OS-ST001	85-265V	50-60Hz	0.95	745x290x125	COB	100W	74.5x29.5x11.5	1
OS-ST001	85-265V	50-60Hz	0.95	895x330x140	COB	150W	88x33.5x11.5	1
OS-ST001	85-265V	50-60Hz	0.95	950x350x140	COB	200W	97x36x12	1
OS-ST001	85-265V	50-60Hz	0.95	950x350x140	COB	250W	96x36x14	1



LED STREET LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS
OS-ST014	85-265V	50-60Hz	0.5	280x112x45	2835	20W	51x34.5x23.5	10
OS-ST014	85-265V	50-60Hz	0.5	307x124x53	2835	30W	38x32x29	5
OS-ST014	85-265V	50-60Hz	0.95	325x124x53	2835	40W	65x32x36	10
OS-ST014	85-265V	50-60Hz	0.95	400x140x53	2835	50W	42x32x40.5	5
OS-ST014	85-265V	50-60Hz	0.95	525x182x60	2835	100W	40x34.5x53.5	5
OS-ST014	85-265V	50-60Hz	0.95	525x182x60	2835	150W	42x32x40.5	5

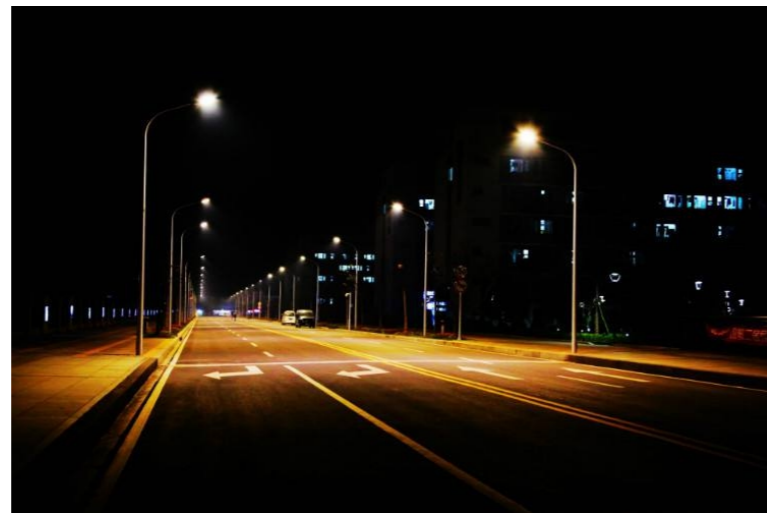

LED STREET LIGHT

Model	Voltage	Frequency	Power Factor	Dimensions (mm)	LED	Power	Packing Size (L*W*H)cm	CTNS/PCS
OS-ST009	85-265V	50-60Hz	0.95	765x398x120	2835	100W	78x41x15	1
OS-ST009	85-265V	50-60Hz	0.95	870x398x120	2835	150W	88x41x15	1
OS-ST009	85-265V	50-60Hz	0.95	975x398x120	2835	200W	98x41x15	1
OS-ST009	85-265V	50-60Hz	0.95	975x398x120	2835	250W	98x41x15	1
OS-ST009	85-265V	50-60Hz	0.95	975x398x120	2835	300W	98x41x15	1

LED STREET LIGHT



OS-ST002

IP:65
CRI>80
Lumen:100-110LM
PF>0.95
AC85-265V
POWER:50W/100W/150W/200W



OS-ST017

IP:65
CRI>80
Lumen:100-110LM
PF>0.95
AC85-265V
POWER:30W/50W/70W/
100W/150W



OS-ST001-SMD

IP:65
CRI>80
Lumen:100-110LM
PF>0.95
AC85-265V
POWER:30W/50W/100W/
150W



OS-ST018

IP:65
CRI>80
Lumen:100-110LM
PF>0.95
AC85-265V
POWER:50W/80W/100W/120W/150W

+86-18680577977



OS-ST880



OS-ST870



OS-ST860

LED STREET LIGHT

Power	Solar Panel	Battery Capacity	LED Chip Quantity	Water Proof	Lighting Time	Irradiated area
20W	350x500x25/6V/20W	3.2V/20Ah	2835 or 3030/56	Ip66	8H	80m ²
20W	480x360x30/15V/20W	11.1V/8Ah	2835 or 3030/56	Ip66	12H	80m ²
20W	550x450x30/15V/30W	11.1V/12Ah	2835 or 3030/56	Ip66	24H	80m ²
30W	480x360x30/15V/20W	11.1V/8Ah	2835 or 3030/56	Ip66	8H	100m ²
30W	550x450x30/15V/30W	11.1V/12Ah	2835 or 3030/56	Ip66	12H	100m ²
30W	670x510x30/15V/50W	11.1V/18Ah	2835 or 3030/56	Ip66	24H	100m ²
50W	550x450x30/15V/30W	11.1V/12Ah	2835 or 3030/96	Ip66	8H	150m ²
50W	670x510x30/15V/50W	11.1V/18Ah	2835 or 3030/96	Ip66	12H	150m ²
50W	670x670x30/15V/60W	11.1V/24Ah	2835 or 3030/96	Ip66	24H	150m ²
100W	670x510x30/15V/50W	11.1V/18Ah	2835 or 3030/96	Ip66	8H	180m ²
100W	890x670x30/15V/80W	11.1V/28Ah	2835 or 3030/96	Ip66	12H	180m ²
100W	1030x670x30/15V/100W	11.1V/18Ah	2835 or 3030/96	Ip66	24H	180m ²

Note: The solar panel is equipped with the light sensor, have control, can be remotely controlled 100% bright or 50% bright, can control the bright time of the lamp. When automatic mode Six hours before is 100% bright, the next 6 hours is 50% bright.



LED Highbay Light



OS-HB005

IP:20
CRI>80
Lumen:100-110LM
PF>0.95
AC85-265V
POWER:90W/130W/180W



OS-UFO-06

IP:20
CRI>80
Lumen:100-110LM
PF>0.95
AC85-265V
POWER:100W/150W/200W



OS-UFO-07

IP:20
CRI>80
Lumen:100-110LM
PF>0.95
AC85-265V
POWER:50W/100W/150W/200W/300W



OS-UFO-08

IP:20
CRI>80
Lumen:100-110LM
PF>0.95
AC85-265V
POWER:100W/150W/200W/240W

+86-18680577977